



**TWO NEW STANDARDS FOR PERFORMANCE & AFFORDABILITY**

The Epson SureColor F-series is the next generation of high-performance dye-sublimation transfer printers. Incorporating advanced printing technology, including Epson's exclusive PrecisionCore™ TFP® printhead and the all-new high-density black ink, the SureColor F-series delivers amazing performance at affordable running costs. The F6270 is designed for sheet production, and is ideal for short-volume dye-sublimation transfer printing of custom clothing, soft signage, merchandise and hard surface work. While the F7270 is designed for roll-based production, and is ideal for short to medium-volume roll-to-roll custom fabric, textile and soft signage.



SC-F6270  
44" Wide Dye-Sub



SC-F7270  
64" Wide Roll-to-Roll Dye-Sub

-   
 Up to 64" Wide\*
-   
 1.5L Ink Tanks
-   
 1 Year Warranty
-   
 Environmentally Friendly



4 COLOURS		DS EPSON ULTRACHROME DYE SUB INK	MAXIMUM MEDIA WIDTH	MAX. INK CAPACITY PER COLOUR	PRINT SPEEDS** SQM/HR		
					MAX SPEED	PRODUCTION	HIGH QUALITY
 	SC-F6270		44"	1.5 L	63.4	22.7	8.3
 	SC-F7270		64"		58.9	22.2	8.2

**ENGINEERED FOR BUSINESS**

**Remarkable Productivity**

Epson's advanced PrecisionCore™ printhead delivers superior print quality, speed and reliability in continuous operations, with minimal downtime.

**Affordable Prints with Peace of Mind**

Cost-effective 1L ink packs and the new high-density black ink ensure lower ink usage and reduced overall printing costs.

**Consistent Vibrant Quality**


Epson UltraChrome™ DS ink is specially formulated to produce vibrant colours, intense blacks, sharp contours and smooth gradations.



\*Up to 64" wide for F7270, 44" for F6270, \*\*All speed is dependent on RIP used

Model Number	SC-F6270	SC-F7270
<b>Printer Width</b>	44"	64"
<b>Printing Technology</b>	PrecisionCore™ TFP® Printhead	
Print Method	360 x 2 nozzles each colour (x4)	
Nozzle Configuration	720 x 1440 dpi	
Maximum Resolution		
<b>Print Modes</b>	<b>Resolution</b>	<b>Pass</b>
Draft	360 x 720	1
High Speed	720 x 720	2
Production	720 x 720	3
Production	720 x 720	4
High Quality	720 x 720	6
High Quality	720 x 1440	8
<b>Ink System</b>	Epson UltraChrome™ DS dye-sublimation ink	
Ink Type	4 colours - Cyan, Magenta, Yellow, High-Density Black	
Colours	1500ml	
Ink Tank Capacity	1000ml	
Ink Pack Capacity		
<b>Paper Handling</b>	Rear roll feed	
Paper Feed Method	(2" / 3" core with max 150mm diameter)	Rear roll feed (2" / 3" core with max 250mm diameter); Auto take-up reel unit
Media Width	254 to 1118mm	300 to 1625.6mm
Printing Width (Margin)	Max. 1112mm	Max. 1615.6mm
	Side Margin: 3mm both sides	Side Margin: 5mm both sides
		(10mm when using Media Holding Plates)
Media Thickness	0.08 - 0.50mm	0.08 - 1mm
	(over 75gsm)	(over 75gsm)
<b>Control Panel</b>	2.5" Colour LCD	
Colour & Size		
<b>Connectivity</b>	Hi-Speed USB 2.0	
Standard	10BASE-T / 100BASE-TX / 1000BASE-T	
Ethernet		
<b>Memory</b>	512MB	
Main	128MB	
Network		
<b>Printer Software</b>	Communication Driver, User's Guide, EPSON LFP Remote Panel 2, EpsonNet Setup, EpsonNet Config, EpsonNet PPrint, Wasatch SoftRIP	
<b>Electrical Specifications</b>	AC 100 - 240V	
Rated Voltage	50 - 60Hz	
Rated Frequency	1.0 - 0.5A	
Power Supply	10 - 5A	
Power Consumption		
Operating	Approx. 65W	Approx. 460W
Standby	Approx. 20W	Approx. 30W w/ heater OFF
Sleep	Approx. 3W	Approx. 10W
Power Off	Less than 0.4W	Less than 0.6W
<b>Recommended Operating Temperature &amp; Humidity</b>	15 - 35°C; 20 - 80% RH (non-condensing)	
<b>Bundled Items</b>	C12C932491	
Ink Supply System and Waste Ink Bottle Kit	-	
Substrate Support System and Ink Supply System	C12C932471	
Initial Ink Pack Set	C12C932111	C12C932111
<b>Optional</b>	<b>Order Code</b>	<b>Order Code</b>
Auto Cutter Blade	C13S902006	-
Media Holding Plate	-	C12C932121
Maintenance Kit	C13S210042	C13S210038
Waste Ink Bottle	C13T724000	C13T724000
Roll Media Adapter	C12C811391	-

**Dimensions & Weight**  
**SC-F6270**  
**Weight:** 94kg (without ink)

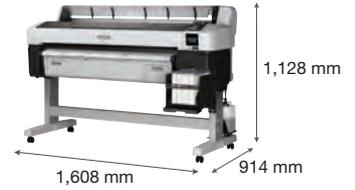

**SC-F7270**  
**Weight:** 274kg (without ink)



**Ink Pack Compatibility**

**1L Ink Packs**

- High Density Black C13T741X00
- Cyan C13T741200
- Magenta C13T741300
- Yellow C13T741400



**Tested for harmful substances**  
 according to Oeko-Tex® Standard 100  
 N-KEN 12143 Nissenken

© 2023 Epson India Pvt. Ltd. All Rights Reserved.  
 Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited. EPSON and EXCEED YOUR VISION are registered trademarks of Seiko Epson Corporation. All other products names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. Print samples shown are simulations only. Specifications and product availability are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.


Information correct at time of printing.  
 Printed in April 2023

**EPSON INDIA PVT. LTD.**  
 12th Floor, The Millenia, Tower A, No.1  
 Murphy Road, Ulsoor, Bangalore 560 008  
 Tel: 080-4566 5000, Fax: 080-4566 5005

Scan the QR code or Click here to contact an Epson representative close to you.



**CONTACT EPSON TODAY! EMAIL:** [vasu@eid.epson.co.in](mailto:vasu@eid.epson.co.in)



**Epson Helpline:** For product info or service - 1800 425 0011  
 For service: 1800 123 001 600 (9AM - 6PM) (Mon-Sat)  
**Email:** [lfp@epsonindia.in](mailto:lfp@epsonindia.in)