

A SCALABLE PHOTO PRINTING SOLUTION WITH A COMPACT FOOTPRINT



SL-D1030



SL-D1030 with Duplex Feeder



Expand your print applications with Epson's minilab printer, featuring both single-sided and double-sided printing.*¹

Give your business an edge with Epson's SureLab SL-D1030. Carefully engineered to produce sharp, colour-accurate photos with the reliable Micro Piezo™ Printhead Technology, the compact yet sturdy minilab printer delivers picture-perfect precision on every print. Enjoy double-sided printing*¹ along with improved productivity with complete ease. Be it glossy or lustre photo papers, flawlessly bring images to life with Epson's SureLab SL-D1030.

ULTRACHROME
D6r-S
INK

*¹ Duplex Feeder is required for double-sided printing. Only cut-sheet media applicable for double-sided printing.


SPECIFICATIONS

SURELAB SL-D1030

MODEL NUMBER	SL-D1030
SKU CODE	C11CJ33402
PRINTING	
Technology 1	Micro Piezo™ Inkjet Technology
Technology 2	Variable-Sized Droplet Technology
Printhead	Micro Piezo™ Printhead
Nozzle Configuration	1,080 nozzles (180 nozzles x 6 channels x 1 head)
Maximum Resolution	1,440 x 720 dpi
Maximum Ink Droplet Volume	2.5 pl
INK SYSTEM	
Ink Type	Epson UltraChrome™ D6r-S Dye Ink
Colours	Cyan, Magenta, Yellow, Light Cyan, Light Magenta, Black
Ink Capacity	250 mL
MEDIA HANDLING	
Maximum Roll Diameter	Max. 170 mm
Maximum Roll Weight	Max. 4 kg
Paper Width Roll Paper	89mm to 210 mm
Cut Sheet	Width: 89 mm – 210 mm ; Length: 148 mm – 1,000 mm
Paper Size ASF	Width: 89 mm – 210 mm ; Length: 148 mm – 297 mm
Paper Thickness	Roll: 0.22 mm – 0.25 mm / Manual: 0.20 mm – 0.50 mm / ASF: 0.20 mm – 0.265 mm
Maximum Printable Length	Roll: Max. 1,000 mm, Min. 50 mm / Manual Feed: 1,000 mm / Auto Sheet Feeder (ASF): 297 mm
CONNECTIVITY	
Interfaces	High-Speed USB, 100BASE-TX/10BASE-T, IEEE802.11b/g/n, Wi-Fi
Printer Language	ESC/P-R
Memory	1 GB
ENVIRONMENT CHARACTERISTICS	
Temperature (°C)	Operating: 10°C – 35°C ; Storage: -20°C – 40°C
Humidity	Operating: 20 – 80% (No Condensation); Storage: 5 – 85% (No Condensation)
DIMENSIONS & WEIGHT	
With Printing (W x D x H)	Roll: 460 x 747 x 441 mm Manual Feed: 460 x 747 x 476 mm ASF: 460 x 747 x 441 mm
Stowed (W x D x H)	460 x 374 x 343 mm
Weight (Excl. Ink Cartridge)	23.1 kg Main unit: 17.6 kg, Duplex Feeder: 5.5 kg
ELECTRICAL SPECIFICATION	
Voltage	AC 100 to 120 V, 220 to 240 V, 50/60 Hz
Power	Operating: Approx. 80 W / Ready: Approx. 14 W / Sleep: Approx. 1.2 W / Standby: Approx. 0.2 W
NOISE LEVEL	
Sound Pressure Level	< 50 dB(A) or less
UTILITY SOFTWARE	
Bundled in CD	Windows®: Printer Driver, Installer Package, Software Updater, EpsonNet Print, EpsonNet setup, EpsonNet Config SE, Manual Package, System Software, Mac OS X: Installer Package
Window Supported OS	OS: Windows® 10, Windows® 8.1 for each 32bit/64bit
Mac Supported OS	OS: Macintosh Mac OS X (10.9.5 or later), Mac OS 11.X

DIMENSIONS & WEIGHT

SL-D1030 Main Unit SL-D1030 Main Unit with Duplex Feeder

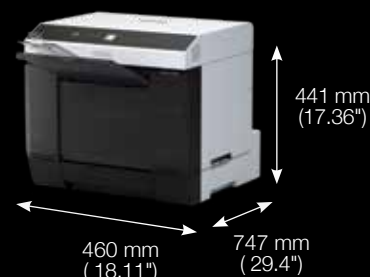

OPTIONS

Duplex Feeder	C12C936001
Spindle Unit	C12C935981

INK (250mL)

Black	C13T46P100
Cyan	C13T46P200
Magenta	C13T46P300
Yellow	C13T46P400
Light Cyan	C13T46P500
Light Magenta	C13T46P600

Other Consumables

Maintenance Box	C13S400086
Roller Assembly Kit	C13S210124
Roller Assembly Kit 2	C13S210137

© 2025 Epson India Pvt. Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited. EPSON is registered trademark of Seiko Epson Corporation. All other products names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. Print samples shown are simulations only. Specifications and product availability are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct as of May 2025.

EPSON INDIA PVT. LTD.

11th Floor, Godrej Centre, Hebbal, Survey No. 26, Bellary Road, Sahakar Nagar, Byatarayanapura, Bangalore 560 092, Karnataka.
Tel: 080-6939 5000 Fax: 080-6939 5005

Regional Offices:

Ahmedabad 4037 0075, Chennai 4905 5177, Coimbatore 98942 19200, Ernakulam 4012 315, Hyderabad 4857 0032, Jaipur 4923 119, Kolkata 4603 4714/15/29/30, Mumbai 3079 8200, New Delhi 4107 3101, 4752 2414, Pune 2998 0641



Epson Helpline: For product info or service - 1800 425 0011

For service: 1800 123 001 600 or 1860 3000 1600 (9 am - 6 pm) (Mon - Sat)

Email: lpf@epson-india.in

www.epson.co.in