

LARGE FORMAT TECHNICAL PRINTERS
**SURECOLOR™ SC-T3730E/T3730DE/T3730D/
T5730D/T7730D**

EPSON


CUTTING-EDGE INNOVATION FOR HIGH VOLUME AND SECURED PRINTING.



SC-T3730E
60.96 cm (24")



SC-T3730D/DE
60.96 cm (24")

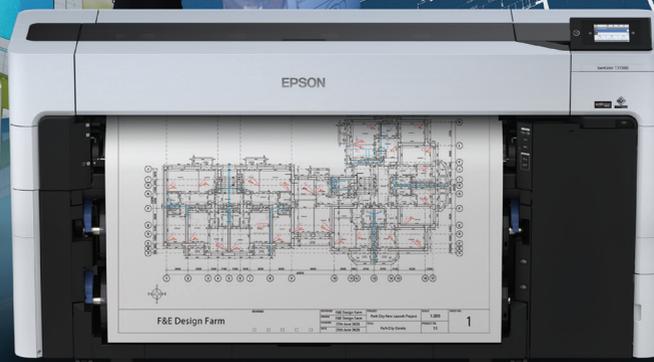

SC-T7730D
111.76 cm (44")



SC-T5730D
91.44 cm (36")

Exceptional performance, spectacular precision, and true-to-life colours from your SureColor™ printer.

Be ready to amplify your ideas and showcase them in spectacular precision with Epson's new SureColor technical printer series. Equipped with PrecisionCore™ MicroTFP® printheads for precise printing and vivid colour-accurate prints using the UltraChrome™ XD3 inks. In addition, versatile printing capabilities, the printers come equipped with user-friendly functions and secured management for businesses to enjoy a seamless printing process. Get ready to be mesmerised by the exceptional line printing accuracy and top-class efficiency.

ULTRACHROME
XD3
INK



SPECIFICATIONS

MODEL NUMBER SKU Code	SC-T3730E/DE/D C11CH79402/C11CH80409/ C11CH80402	SC-T5730D C11CH81402	SC-T7730D C11CH83402
Printer Width	60.96 cm (24")	91.44 cm (36")	111.76 cm (44")
Printing Technology	PrecisionCore™ MicroTFP® Printhead		
Print Head	9,600 Nozzles (400 nozzles x 24 channels x 1 head)		
Nozzle Configuration	2,400 x 1,200 dpi		
Maximum Resolution	3.5 pl		
Minimum Ink Droplet Volume	±0.1% or ±0.26 mm		
Line Accuracy	0.08 mm ¹ (0.02 mm ²)		
Minimum Line Width			
Print Speed	A1 Size Plain Paper: 16 sec (Draft), 21 sec (Speed), 111 sec (High Quality) Premium Glossy Photo Paper 170 gsm: 65 sec (Speed), 111 sec (Quality), 245 sec (Max Quality)	A0 Size Plain Paper: 25 sec (Draft), 32 sec (Speed), 184 sec (High Quality) Premium Glossy Photo Paper 170 gsm: 108 sec (Speed), 184 sec (Quality), 417 sec (Max Quality)	B0 Size Plain Paper: 35 sec (Draft), 46 sec (Speed), 258 sec (High Quality) Premium Glossy Photo 170 gsm: 152 sec (Speed), 281 sec (Quality), 614 sec (Max Quality)
CAD	A1 Size Plain Paper 300 dpi x 600 dpi Line Draw/Draft: 20 sec, 600 dpi x 600 dpi Line Draw/Speed: 27 sec	A1 Landscape Plain Paper 300 dpi x 600 dpi Line Draw/Draft: 16 sec, 600 dpi x 600 dpi Line Draw/Speed: 23 sec	A0 Size Plain Paper 300 dpi x 600 dpi Line Draw/Draft: 28 sec, 600 dpi x 600 dpi Line Draw/Speed: 43 sec
Poster	A1 Size Plain Paper 300 dpi x 600 dpi EPSON Vivid/Speed: 21 sec	A0 Size Plain Paper 300 dpi x 600 dpi EPSON Vivid/Speed: 32 sec	B0 Size Plain Paper 300 dpi x 600 dpi EPSON Vivid/Speed: 46 sec
Ink System	UltraChrome™ XD3 Pigment Ink		
Ink Type	Cyan, Magenta, Yellow, Red, Matte Black, Photo Black		
Colours			
Paper Handling	Roll (Double Roll), Cut Sheet (Manual Feed), Poster Board (Manual Feed)		
Paper Path	2/3" Core, Max. 170 mm		
Maximum Roll Diameter	6.8 kg		
Maximum Roll Weight	254 – 610 mm		
Paper Width	Roll	10.5 kg	12.5 kg
	Cut Sheet	254 – 914 mm	254 – 1,118 mm
		203 – 610 mm	203 – 914 mm
		203 – 610 mm	203 – 1,118 mm
Margin (Roll Paper) ³	Top, Bottom: Min. 3 mm right, left: Min. 0 mm		
Margin (Cut Sheet) ³	Top: Min. 3 mm, Bottom: Min. 12.7 mm right, left: Min. 0 mm		
Media Thickness	Roll: 0.07 mm – 0.8 mm, Cut Sheet: 0.07 mm – 0.8 mm, Poster Board: 0.8 mm – 1.5 mm		
Borderless Width Sizes (mm) ⁴	1118, 1030, 914, 841, 728, 700, 610, 594, 515, 508, 500, 432, 406, 356, 330, 300, 254		
Connectivity	USB 3.0, Ethernet (100BASE-TX/1000BASE-T), Wi-Fi (IEEE802.11b/g/n)		
Interface	Wi-Fi Direct (Simple AP, up to 8 device connections)		
Wi-Fi Direct	Yes ⁵		
USB Host	SC-T3730D / T5730D / T7730D: PDF, TIFF, JPEG, HP-GL/2 ⁶ , HP RTL ⁸		
USB Direct Print ⁶	SC-T3730E/T3730DE: Epson Scanned PDF, TIFF, JPEG, HP-GL/2 ⁶ , HP RTL ⁸		
Printer Languages ⁷	SC-T3730D / T5730D / T7730D: ESC/R raster, HP-GL/2 ⁶ , HP RTL ⁸ , Adobe PostScript 3, Adobe PDF 1.7		
	SC-T3730E/T3730DE: ESC/R raster, HP-GL/2 ⁶ , HP RTL ⁸		
Control Panel	4.3" Touch Screen		
Mobile Solutions	Epson Smart Panel, Apple AirPrint		
Memory	4GB + 960GB (Option SSD)		
Operating System	Windows XP (32bit/64bit) / Vista / 7 / 8 / 8.1 / 10 / 11 Windows Server 2003 SP2 or later / 2008 / 2012 / 2016 / 2019 / 2022 Mac OS X 10.6.8 or later		
Electrical Specifications	AC 100-240V 50/60Hz		
Voltage	3.4-1.6A		
Rated Current			
Power Consumption	Operating	75 W	80 W
	Ready	32 W	32 W
	Sleep	2.0 W	2.0 W
	Standby	0.3 W	0.3 W
Environmental Conditions	Operating: 10°C to 35°C, Storage: -20°C to 40°C		
Temperature	Operating: 20% to 80% (no condensation), Storage: 5% to 85% (no condensation)		
Humidity	46 dB(A)	46 dB(A)	50 dB(A)
Sound Pressure	6.3 B(A)	6.4 B(A)	6.6 B(A)
Sound Power			
Dimensions & Weight	Dimension (W x D x H), Stowed		
	1,365 x 499 x 975 mm	1,645 x 499 x 975 mm	1,848 x 499 x 975 mm
Weight	118.1 kg	136.8 kg	155 kg
What's In The Box	Printer, Initial ink packs, AC power cable, Setup guide, Software CD-ROM, Maintenance box		

Dimensions and Weight

SC-T3730E/DE/D

Weight: Approx. 118.1 kg



SC-T5730D

Weight: Approx. 136.8 kg



SC-T7730D

Weight: Approx. 155 kg



OPTIONS

Roll Feed Spindle (24")	C12C937711
Roll Feed Spindle (36")	C12C937671
Roll Feed Spindle (44")	C12C936171
SSD Unit (960 GB)	C12C936671

CONSUMABLE

Maintenance Box	C13S210115
Borderless Maintenance Box	C13S210116
Printer Cutter Blade	C13S210117
Cleaning Stick	C13S090013

© 2024 Epson India Pvt. Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited. EPSON is registered trademark of Seiko Epson Corporation. All other products names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. Print samples shown are simulations only. Specifications and product availability are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing.
Printed January 2024

¹ ISO/IEC 24790, Single weight matte paper, CAD/Line Drawing, Speed, High Speed=Off, Finest Detail=On. ² Addressable.

⁴ Max supported size depends on the max supported width of printer. ⁵ Not supported for USB memory with an encryption or security function. Not-guarantee connected through USB memory reader/writer or extension cable. ⁶ T3730E/T3730DE: Epson Scanned PDF, TIFF, JPEG, HP-GL/2, HP RTL

⁷ T3730E/T3730DE: ESC/P raster, HP-GL/2, HP RTL. ⁸ It is recommended to do test before purchasing printer if HP-GL/2 or HP RTL direct print is used, because whether supported or not depends on application or data.

EPSON INDIA PVT. LTD.

12th Floor, The Millenia, Tower A, No.1, Murphy Road, Ulsoor, Bangalore - 560 008. Tel: 080-4566 5000 Fax: 080-4566 5005

Scan the QR code to contact an Epson representative close to you.



CONTACT EPSON TODAY! EMAIL: pravin@eid.epson.co.in



Epson Helpline: For product info or service - 1800 425 0011

For service: 1800 123 001 600 or 1860 3000 1600 (9 am - 6 pm) (Mon - Sat)

Email: lfp@epson-india.in

www.epson.co.in