


# Multi-purpose intelligent projector

**EPSON**  
EXCEED YOUR VISION

The new EB-1460Ui & EB-696Ui give people the power to actively participate.  
Get involved and make a decisive meeting with Epson!

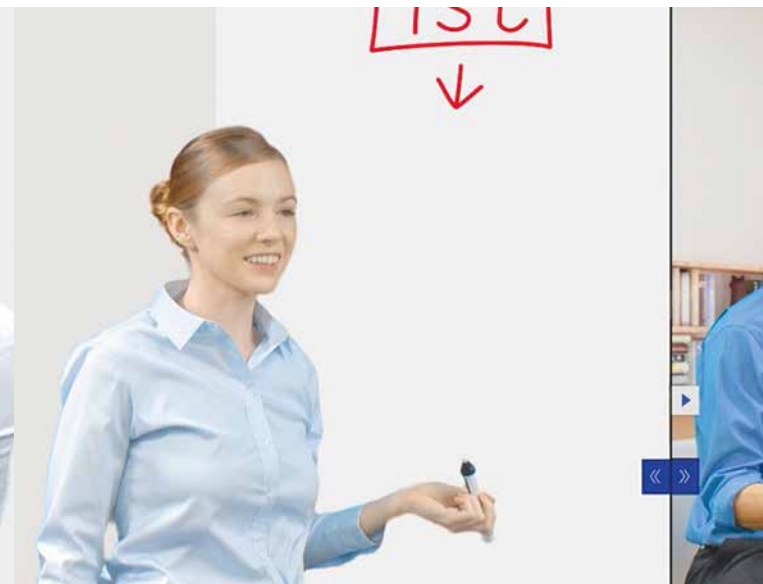

## More Productive

-  Brighter and Sharper Images for Quick and Decisive Meetings
-  Digital Whiteboard for More Dynamic Meetings  
For EB-1460Ui only
-  Finger Operation Facilitates Smoother, More Convincing Meetings

## More Speedy

-  Quicker and Smoother Meetings in Every Way
-  Do Away with Meeting Preparation

## More Collaborative

-  Improve Quality of Remote Conferencing

EB-1460Ui | EB-696Ui




# Brighter and Sharper Images for Quick and Decisive Meetings



## Brighter images

The high brightness 4400lm\* allows you to project clear images even in a bright meeting room.

\*EB-1460Ui is 4,400lm, EB-696Ui is 3,800lm

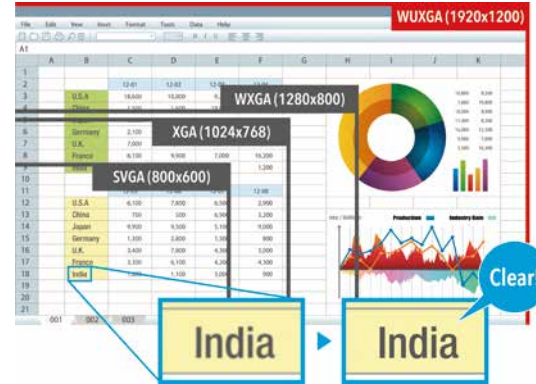

## Sharper images

The adoption of WUXGA resolution surpasses that of Full HD, offering sharper images and more clarity of fine print in applications such as Excel. Furthermore, you can project more information at once for more immediate decisions.



## Bigger Images

Projection of images up to a 100 inch screen size offers high visibility to all meeting participants.



## No reflection

Because there is no reflection from windows or fluorescent lights, you can provide consistent image quality to all, regardless of seating position.



## Dual-screen interactive display

It's possible to combine 2 screens into a single large screen with interactive functionality. This means you can write more information without worrying about limited drawing space.



## Video output feature

You can output the projected image to another projector. This allows you to display images of the whiteboard on a bigger screen for a large number of people at events like a lecture in a great hall.

\*EB-1460Ui only




## Split screen

Using the split screen function allows images from 2 input sources to be projected simultaneously. The maximum 100 inch screen size is large enough to clearly project two images. This is a very convenient feature for things like video conferencing. When making annotations on one screen, during a TV conference for example, the material is also projected on the other screen.

Change your meetings  
More Productive



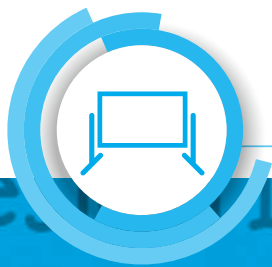

# Digital Whiteboard for More Lively Meetings

\*EB-1460Ui only




Change your meetings  
More Productive



## Digital whiteboard capability

If no input source is detected, you can use as a digital whiteboard immediately after start up. It offers intuitive operation when using not just the interactive pen, but with touch finger operation as well. Furthermore, two pens can be used at the same time, and offer writing and highlighting capability in a variety of colors.

\*EB-1460Ui only

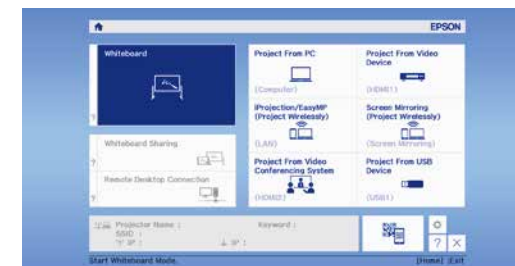

## Home screen for more intuitive operation


Because the home screen appears at start up, operation can be done more intuitively.



## Generate up to 50 pages

There's no need to worry about running out of space when writing meeting notes or importing information as with a conventional whiteboard. It's possible to add up to 50 pages.

\*EB-1460Ui only

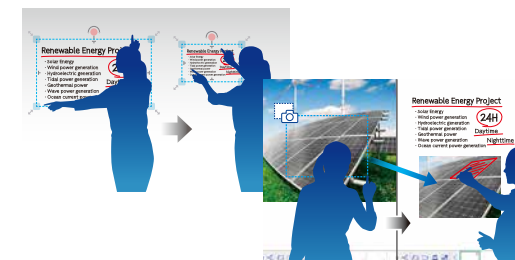

## All on-screen items can be rearranged and edited freely

Any images or writing on the screen can be resized and moved as if it were an object. So, even if there is no writing space on the screen, written contents can be shrunk down to make room for new annotations.

\*EB-1460Ui only



# Finger Operation Facilitates Smoother, More Convincing Meetings



## Highly persuasive presentations

Making use of the annotation functions of the interactive pen, and the gesture capabilities of finger touch operation allow you to create smooth and persuasive presentations. Operation is similar to that of a giant tablet.



## PC mouse operation

Connecting the projector to a PC via USB cable makes it possible to operate the PC mouse using the included interactive pen and even your finger\*.



## Enhanced interactive pen

Enhancements to the pen tip include not just improved reaction speed, but the use of a softer pen tip helps to decrease noise when drawing. By making improvements to the writing experience, You can proceed your meetings more smoothly.



## Remote Desktop

The Remote Desktop feature allows a PC to be controlled remotely even though the PC itself is not located in the meeting room. Conduct activities like idea meetings even without a PC.



## Miracast compatibility


By creating a wireless connection between the projector and a tablet or smartphone, you can mirror the device and display content such as PowerPoint and video files. Because no cabling is required, you are able to conduct a more polished meeting.

\*EB-1460Ui only



## Wireless PC projection

Using Epson Easy MP Multi PC Projection allows you to connect with a PC wirelessly. If more than one person wants to project, up to 4 screens can be displayed at a time, and the transition between which PCs are being projected can be done smoothly. In case of single connection, you also have the ability to control mouse operation wirelessly.

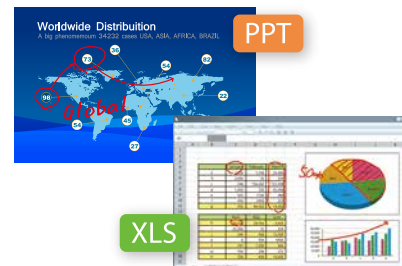

## Compatible with Microsoft Office's Ink function

When used with Microsoft Office (Windows Vista or later), users can handwrite comments and diagrams directly into the document then save it in the original file format.



## Annotate over various source contents

The included interactive pen or even your finger\* can annotate on projected images from a variety of input sources even without a PC connection. This has many practical business applications including document revision and adding handwritten signatures.

**Change your meetings  
More Productive**






# Quicker and Smoother Meetings in Every Way



## Quick information sharing

Get through your meetings smoothly by projecting information gathered from a variety of devices to a single whiteboard. This allows you to share information on a large screen from sources including paper and individual tablets. When the meeting is finished, you can share the content of proceedings of meeting via e-mail, print it, and save it to a network or PC directly.

\*EB-1460Ui only

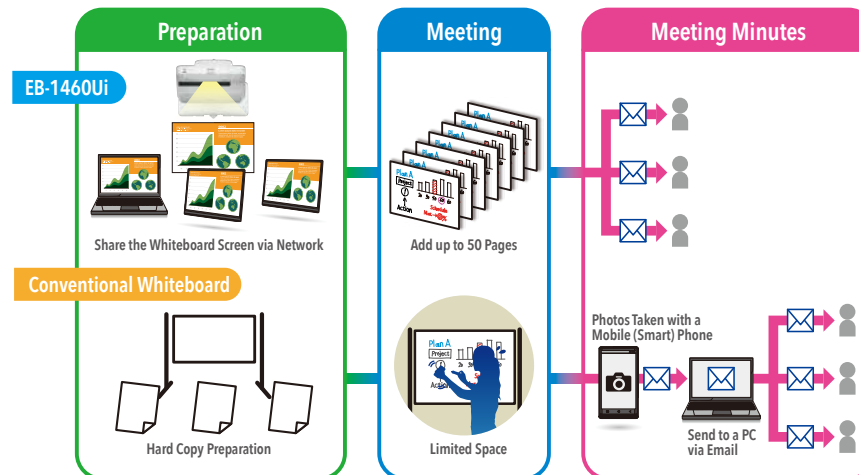

## Shorten the total meeting time


Everything from preparation of materials to distributing meeting minutes can be done more quickly. In comparison with meetings held using a conventional whiteboard, it is possible to streamline your meetings and shorten runtime significantly.



## Share meeting minutes via email

At the end of the meeting you can distribute the meeting minutes and content to up to 50 participants via email. Because it can be connected to an Active Directory server, you can simply search for a participant's name and select their email address.

\*EB-1460Ui only

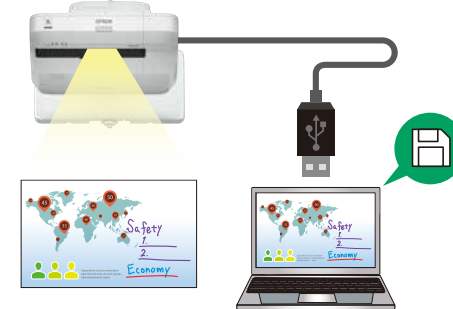


## Easy to save meeting minutes to a PC

Simply connect to a PC via USB cable and you can save the meeting contents directly to the PC. Even in situations where access to USB memory is not available, you can easily save and distribute the contents of a meeting.

\*EB-1460Ui only

**Change your meetings  
More Speedy**

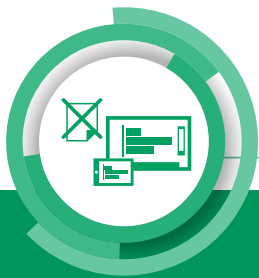

# Do Away with Meeting Preparation



## Eliminate meeting preparation

Because you can view the whiteboard content on a PC or tablet, there is no need to prepare a paper source, which means a significant reduction in meeting preparation time. In addition to its browsing capabilities, writing and editing can be entered from either side. Also, if someone comes late, it is easy to go back to a previous page to see the contents from earlier in the meeting.

\*EB-1460Ui only



## Whiteboard sharing with up to 15 devices

Up to 15 devices can be connected with the whiteboard sharing feature. This function is not just for PC and tablet connectivity, the ability to connect with other EB-1460Ui series projectors makes remote conferencing possible as well.

\*EB-1460Ui only



## Connect easily with QR code scanning

QR code scanning makes it easy to connect to a whiteboard sharing with smartphones and tablets. A simple scan of the QR code eliminates the need for complicated configurations and text input.

**Change your meetings  
More Speedy**



# Improve Quality of Remote Conferencing



## Advanced video conferencing

In addition to the typical video conference functionality, the ability to share whiteboard contents with the other party facilitates more effective two-way communication. Furthermore, the possibility of projecting a 100 inch screen ensures an ample screen size even with a split screen display.

\*EB-1460Ui only



## Sliding split screen

Memos can be written easily at any time by simply dragging out from the edge of the screen. This feature is not limited to video conferences, but can be used in any situation where you wish to take notes such as presentations or internal meetings.

\*EB-1460Ui only



## Output images to video conference system

Whiteboard images and video from other sources can be input to the video conference system via the DVI output terminal. By sharing content from the projector with remote offices you can begin implementing more effective meetings with distant locations.

\*EB-1460Ui only

Change your meetings  
More Collaborative



# Specifications



					EB-1460Ui	EB-696Ui		
Specification of Main Parts	LCD	Size			0.67-inch (D10)			
		Pixel Number			2,304,000dots (1920 x 1200) x 3			
		Native Resolution			WUXGA			
	Projection Lens	Type			No Optical zoom / Focus (Manual)			
	Lamp	Type			300W UHE	267W UHE		
		Life			5000 hours (Power consumption: Normal) 10000 hours (Power consumption: ECO)			
Screen Size (Projected Distance)					70" to 100" [40.5 to 59.3cm] 90" screen 53 cm			
					Throw ratio 0.27 (Zoom:Wide); 0.37 (Zoom:Tele)			
Offset					5.8:-1			
Light Output (Brightness)	Normal (Color mode:Dynamic, Zoom:Wide)				4400 lm	3800 lm		
	ECO (Color mode:Dynamic, Zoom:Wide)				2900lm			
Color Light Output (Color Brightness) (Color mode:Dynamic, Zoom:Wide)					4400 lm	3800 lm		
Contrast					16000:1			
					(Color mode:Dynamic, Power consumption: Normal, Zoom:Wide, Auto iris:On)			
Internal Speaker(s)	Sound Output				Monaural: 16W x 1			
Adjustment Function	Settings	Geometry Correction			V Keystone, H Keystone, Quick Corner, Arc Correction, Memory (Arc Correction)			
		Split Screen			Yes			
		Image Shift			Yes			
		Mic Input Level			N/A	Yes		
	Extended	Projection			Yes (Front, Front/Upside down, Rear, Rear/Upside down)			
		Operation			Direct Power On, High Altitude Mode, Auto Source Search, Auto Power On (PC, USB-B), Date / Time Settings, Connect ELPCB02 (For EB-696Ui only)			
		A/V Settings			A/V Output, Audio Output, HDMI Audio Output, DVI Output (For EB-1460Ui only), HDMI2 Out (Split Screen) (For EB-1460Ui only)			
		USB TypeB			Yes			
		Language			Yes			
		Reset			Yes			
		ECO			Power Consumption (Auto, Normal, ECO), Light Optimizer, Sleep Mode, Sleep Mode Timer, A/V Mute Timer, Standby Mode(Communication On, Off), ECO Display, Reset			
	Video I/O	In	Analog	D-sub 15pin	RGB, Component, RGB-Video	1 (Blue molding)		
				RCA	Composite	1 (Yellow)		
			Digital	HDMI (CEC)			2*	3*
Out		Analog	D-sub 15pin	RGB, RGB-Video	*HDMI 1:In common with MHL			
					1 (Black molding) (Output signal : Computer 1 only)			
		Digital	DVI-D			1 (HDCP contents are not supported)	N/A	
Audio I/O	In	Stereo mini			2			
	Out	Stereo mini			1			
Mic. I/O	In	Stereo mini			N/A	1		
Control I/O	RS-232C		D-sub 9pin		1			
	Remote	Stereo mini			1 (for Control Pad)			
	Interactive Sync.	Stereo mini			In x 1, Out x 1			
	Touch Unit Control	Min DIN 8pin			1	N/A		
USB-I/O	Type A		2 (for USB Memory, Printer, USB Document Camera, Firmware update, Copy OSD Settings)			2 (for USB Memory, USB Document Camera, Firmware update, Copy OSD Settings)		
	Type B		1 (for USB Display, Mouse, K/B, Control, Interactive, Saving Data File to PC via Cable)			1 (for USB Display, Mouse, K/B, Control, Interactive, Firmware update, Copy OSD Settings)		
Network I/O	Wired LAN		RJ45		1 (100Mbps)			
	Wireless LAN					1 Type A (for ELPAP10)	1 Type A (for ELPAP10 : Option)	



			EB-1460Ui	EB-696Ui
Wireless Specification (Wi-Fi CERTIFIED Miracast)	Supported Speeds for each mode		IEEE 802.11g (2.4GHz): 54 Mbps*; IEEE 802.11n (2.4GHz): 130.0 Mbps* ;	Optional Wireless LAN Unit ELPAP10
			IEEE 802.11a (5GHz): 54 Mbps*; IEEE 802.11n (5GHz): 270.0 Mbps*;	Optional Wireless LAN Unit ELPAP10
			IEEE 802.11ac (5GHz): 780Mbps*	Optional Wireless LAN Unit ELPAP10
	Supported mode		Wi-Fi Direct	Optional Wireless LAN Unit ELPAP10
	Certification		Wi-Fi CERTIFIED Miracast	Optional Wireless LAN Unit ELPAP10
	Frequency type (modulations)		DSSS/CCK, OFDM, MIMO-OFDM	Optional Wireless LAN Unit ELPAP10
Wireless Specification (Wireless LAN Unit use)	Supported Speeds for each mode		IEEE 802.11b: 11 Mbps^	
			IEEE 802.11g: 54 Mbps^	
			IEEE 802.11n: 130 Mbps^	
	Supported mode		Infrastructure, Access Point	
	Certification		Wi-Fi CERTIFIED (for Wireless LAN unit)	
	Frequency type (modulations)		DSSS/CCK, OFDM	
	Supported security type		Quick Mode : OPEN, WPA2-PSK	Quick Mode : OPEN, WPA2-PSK
			Advanced Mode : OPEN, WPA/WPA2-PSK, WPA/WPA2-EAP	Advanced Mode : OPEN, WPA/WPA2-PSK
		Supported EAP type : PEAP, PEAP-TLS, EAP-TLS, EAP-Fast, LEAP	N/A	
Operating Temperature			Single use:	
			5 °C to 40 °C* <41 °F to 104 °F> ( 0 m / 0 ft to 2286m / 7500ft )	
			5 °C to 35 °C* <41 °F to 95 °F> ( over 2286m / 7500ft )	
			( 20% - 80% humidity, No condensation )	
			* When environmental temperature becomes high, the brightness becomes dark automatically.	
			Multi-projection use*:	
			5 °C to 35 °C** <41 °F to 95 °F> ( 0 m / 0 ft to 2286m / 7500ft )	
			5 °C to 30 °C **<41 °F to 86 °F> ( over 2286m / 7500ft )	
			( 20% - 80% humidity, No condensation )	
			*Except for the case when an airflow between the model was blocked off.	
			**When environmental temperature becomes high, the brightness becomes dark automatically.	
Operating Altitude			0 m to 3000 m(0 ft to 9842 ft)	
			(over 1500 m / 4,921 ft :with High altitude mode)	
Direct Power Off			N/A	Yes
Start-up Period			About 8 seconds	
			Warm-up period: 30 seconds	
Cool-down Period			Instant off	
Power Supply Voltage			100 - 240 V AC +/- 10%, 50/60 Hz	
Power Consumption	220-240V Area (Europe etc)	Lamp On (Power consumption: Normal/ ECO)	490W / 400W	401W/ 334W
		Networked Standby / Energy Saving	Under 3.0W / Under 0.5W	
Dimension	Exclude Feet (W x H x D)		474 x 130 x 447 mm	
	Maximum Dimension (W x H x D)		474 x 164 x 447 mm	
Weight			Approx. 18.7lbs / 8.5 kg	
Fan Noise	Power consumption: Normal		38 dB	
	Power consumption: ECO		30 dB	

\* These modes and actual data throughputs depend on supported wireless mode of source devices and/or environmental conditions.

^ Maximum speed and range is achievable when used with same enhanced mode technology. Actual data rates, features and performance may vary depending on your computer system, the environment and other factors.



# Easy Interactive Part



EB-1460Ui			EB-696Ui	
Interactive Unit Specification	Support Screen Size		70" to 100" [0.41 to 0.59m] 90" screen 0.533 m Throw ratio :0.27 (Zoom:Wide), 0.37 (Zoom:Tele) (as the same as the projection lens spec)	
	Technology		Infrared	
	Input devices		Digital Pen (Easy Interactive Pen 1,2), Finger (1 - 6 fingers)	
	Connection to the computer		USB(Cable), Network	
	Supports multiple input simultaneously (Pens and Fingers)		Yes	
	Calibration		Pen : Auto / Manual (25 points) Finger : Manual (16 points)	
	Functions		Hover, Right click, Auto Adjust Pen Area	
Pen Unit Specification	Normal Pen	Size	161 mm x 24 mm dia. (maximum)	
		Weight	30 g (Excluding a Battery)	
		Side Button	Yes	
		Battery	AA x 1. Manganese dry cell	
Touch Unit Specification	Dimension (W x H x D)	Exclude Protrusion	210 x 95 x 51 mm	
		Maximum Dimension	210 x 95 x 51 mm	
	Weight		450g	
	Technology		Infrared Laser (Class 1)	
	Adjustment of Laser angle		Yes (Manual)	
	Control I/O	I/O Terminal	Mini DIN 8pin x 1	
PC Interactive Tool	Theft Proof	Kensington Lock	Yes	
		Driver Install	Single use Windows, Ubuntu: Interactive Function can be used without installation of driver Mac OS X: Interactive Function can be used with installation of Easy Interactive Driver	
	Multiple Pen / Finger Support	Multi-projection use	Windows, Mac OS X: Interactive Function can be used with installation of Easy Interactive Driver	
			Yes (with Easy Interactive Tools Ver.4.10) Easy Interactive Pen: Up to 2. / Finger: Up to 6.	
	Projector Control function		Yes (Home, Capture, Print, Save, Image Share, Source Select, Zoom, A/V mute, Freeze, Volume, Split Screen)	Yes (Home, Print, Save, Image Share, Source Select, Zoom, A/V mute, Freeze, Volume, Split Screen, Doc cam, Power)
	Support OS		Windows Vista SP2, 7 SP1, 8, 8.1, 10 (Not support for XP) Mac OS X 10.7 - 10.11 (Not support for 10.5, 10.6) Ubuntu 14.10, 15.04, 15.10, 16.04 LTS	
	PC Free Annotation Tool		Driver Install No need	
Whiteboard Tool	Multiple Pen / Finger Support		Yes Easy Interactive Pen: Up to 2. Finger: Up to 2	
	Whiteboard function		Yes	N/A
	Projector Control function		Yes (Home, Capture, Print, Save, Image Share, Source Select, Zoom, A/V mute, Freeze, Volume, Split Screen)	Yes (Home, Print, Save, Image Share, Source Select, Zoom, A/V mute, Freeze, Volume, Split Screen, Doc cam, Power)
	Driver Install		No need	N/A
PC Applications	Multiple Pen / Finger Support		Yes Easy Interactive Pen: Up to 2 Finger: Up to 6.	N/A N/A N/A
	Whiteboard function		Yes	N/A
	Multi page support		Yes	N/A
	Power Off Recovery		Yes	N/A
	Template function		Grids, Ruled lines, User templates, Preset templates	N/A
	Preserve meeting support		USB, Network	N/A
	Export meeting support		USB, Network, E-Mail, Browser(Only for sharing server mode)	N/A
	Supported Format		PDF, PNG, JPEG, EWF	N/A
	Capture from other source		Yes (Except secure contents)	N/A
	Scanner support		Yes	N/A
	Printer support		Yes	N/A
	Projector Control function		Yes (Input, A/V mute, Split Screen)	N/A
	Sharing Whiteboard function		Yes	N/A
			Easy Interactive Tools Ver 4.20 (for Windows)	
			Easy Interactive Tools Ver 4.20 (for Mac OS X)	
			Easy Interactive Driver Ver 4.00 (for Windows)	
			Easy Interactive Driver Ver 4.00 (for Mac OS X)	
			TWAIN Driver for Epson Document Camera Ver.2.00 (for Windows)	

# Easy MP Part


		EB-1460Ui	EB-696Ui
Projector control and projector management via network	E-mail notification	Yes	
	SNMP	Yes	
	Web remote	Yes	
	Web control	Yes	
	Secure HTTP	Yes	
	PJLink	Yes (Class2)	
	AMX Device Discovery	Yes	
	Crestron Integrated Partner	Yes	
	Crestron RoomView	Yes	
	Extron IP Link	Yes	
	Control4	Yes	
PC Free	Photo	Yes	
	PDF	Yes	N/A
	Movie (MotionJPEG)	Yes	
Multi PC Projection		Yes	
Message Broadcasting		Yes	
Firmware Update	Network via LAN Cable	Yes	
	USB (A) via USB Thumb Drive	Yes	
	USB (B) via USB Cable	N/A	Yes
Copy OSD Settings	Network via LAN Cable	Yes	
	USB (A) via USB Thumb Drive	Yes	
	USB (B) via USB Cable	N/A	Yes
PC applications		EasyMP Monitor Ver 4.57 (for Windows)	
		EasyMP Monitor Plug-in Message Broadcasting Ver.1.02	
		P Monitor Plug-in Service Menu Viewer Ver.1.06	
		EasyMP Multi PC Projection Ver 2.10 (for Windows)	
		EasyMP Multi PC Projection Ver 2.10 (for Mac OS X)	
		USB Display Ver.1.70 (for Windows)	
		USB Display Ver.1.72 (for Mac OS X)	
		Epson iProjection Ver2.2.0 (for iOS)	
		Epson iProjection Ver2.2.0 (for Android)	
		Epson iProjection Ver1.0.0 (for Chromebook)	
		EasyMP Network Updater Ver.1.23	

## Supplied Accessories (For EB-1460Ui & EB-696Ui)

Remote Control
Battery for Remote Control (AA X 2)
Battery for Easy Interactive Pen (AA X 2)
Easy Interactive Pen- 2pcs
Pen tip(Felt) - 4pcs
Pen tip(Teflon) - 2pcs
Pen tip Holder - 1pcs
Light Curtain Unit
Power Cable 4.5m
Setting Plate
Pen Tray (For EB-696Ui only)
USB Cable - 5.0m (For EB-696Ui)
- 5.0m x 2 & 1.8m x 1 (For EB-1460Ui)
Password Protect sticker (For EB-696Ui only)
Pen Stand (For EB-1460Ui only)
Control Pad - Power, Whiteboard / last source, Source Search (For EB-1460Ui only)
Wireless LAN unit w/ Screw (For EB-1460Ui only)
Stereo mini cable for Control Pad ( For EB-1460Ui only)

## Optional Accessories (For EB-1460Ui & EB-696Ui)


Spare Lamp	ELPLP92
Air Filter Set	ELPAF45
Table projection mount	ELPMB29
Wireless LAN Unit	ELPAP10 (For EB-696Ui only)
Easy Interactive Pen 1 (Orange)	ELPPN05A
Easy Interactive Pen 2 (Blue)	ELPPN05B
Replacement Hard Pen Tips	ELPPS03 (for ELPPN05)
Replacement Soft Pen Tips	ELPPS04 (for ELPPN05)

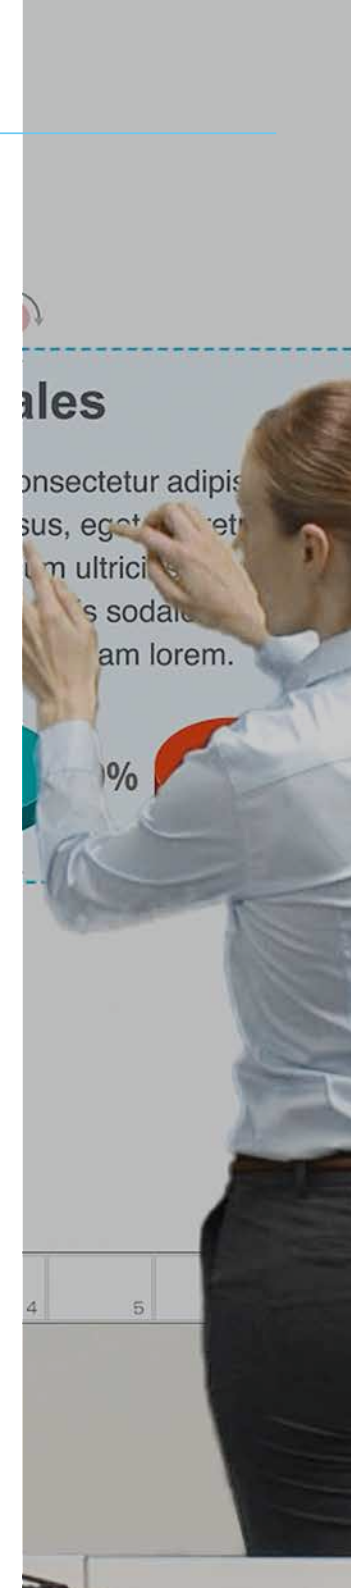




# Projection Distance


16:10 Screen Size	Projection distance		Offset (V1A)		Offset (V2A)		Offset (V1B)		Offset (V2B)		Offset (V1C)		Offset (V2C)	
	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)	Shortest (Wide)	Longest (Tele)
	Y (cm / inch)		Y (cm / inch)		Y (cm / inch)		Y (cm / inch)		Y (cm / inch)		Y (cm / inch)		Y (cm / inch)	
52		40.6 / 15.9		25.3 / 9.9		95.3 / 37.5		40.4 / 15.9		110.5 / 43.5		41.4 / 16.3		111.4 / 43.8
60		47.4 / 18.6		30.2 / 11.8		110.9 / 43.6		45.4 / 17.8		126.1 / 49.6		46.3 / 18.2		127.1 / 50
70	40.5 / 15.9	55.8 / 22	12.9 / 5.1	36.3 / 14.3	107.2 / 42.2	130.5 / 51.4	28.1 / 11	51.1 / 20.2	122.4 / 48.1	145.7 / 57.3	29.1 / 11.4	52.5 / 20.6	123.4 / 48.5	146.7 / 57.7
75	43.6 / 17.1	60.1 / 23.6	14.3 / 5.6	39.4 / 15.5	115.3 / 45.4	140.3 / 55.2	29.5 / 11.6	54.6 / 21.5	130.5 / 51.4	155.5 / 61.2	30.5 / 12	55.6 / 21.8	131.5 / 51.7	156.5 / 61.6
80	46.7 / 18.4	64.3 / 25.3	15.7 / 6.2	42.4 / 16.7	123.4 / 48.6	150.1 / 59.1	30.9 / 12.2	57.6 / 22.7	138.6 / 54.6	165.3 / 65.1	31.9 / 12.5	58.6 / 23.1	139.6 / 54.9	166.3 / 65.5
90	53 / 20.8	72.8 / 28.6	18.6 / 7.3	48.6 / 19.1	139.7 / 55	169.7 / 66.8	33.8 / 13.3	63.8 / 25.1	154.9 / 61	184.9 / 72.8	34.7 / 13.6	64.8 / 25.5	155.9 / 61.3	185.9 / 73.2
100	59.3 / 23.3		21.4 / 8.4		156 / 61.4		36.6 / 14.4		171.2 / 67.4		37.5 / 14.7		172.2 / 67.7	

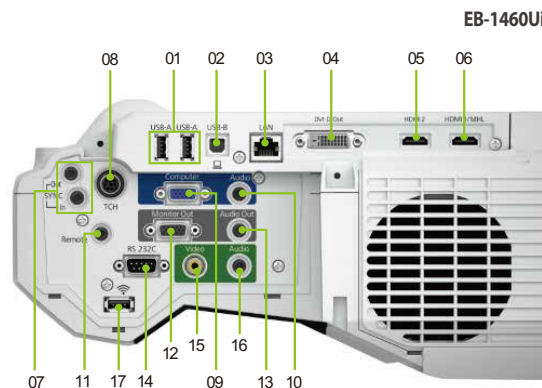

01 USB-A (2pcs)	02 USB-B	03 LAN
04 DVI-D-Out	05 HDMI 2	06 HDMI 1/ MHL
07 SYNC In & Out	08 TCH	09 Computer (D-SUB15)
10 Audio 1	11 Remote	12 Monitor Out
13 Audio Out	14 RS-232C	15 Video
16 Audio 2	17 Wifi port	

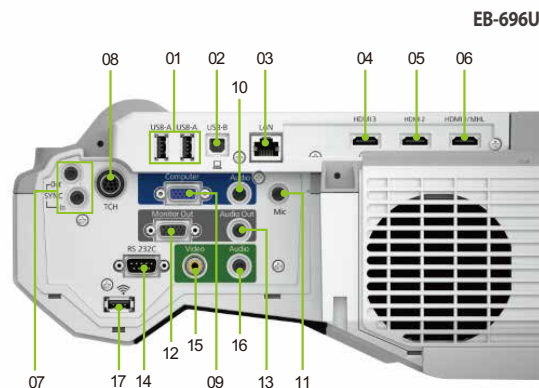

01 USB-A (2pcs)	02 USB-B	03 LAN
04 HDMI 3	05 HDMI 2	06 HDMI 1/ MHL
07 SYNC In & Out	08 TCH	09 Computer (D-SUB15)
10 Audio 1	11 Mic	12 Monitor Out
13 Audio Out	14 RS-232C	15 Video
16 Audio 2	17 Wifi port	

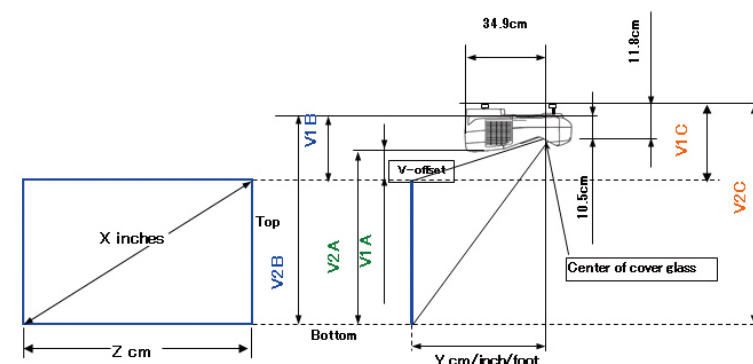

2 Year Onsite Warranty Service to be provided for local purchase only.

# The warranty service can be extended by purchasing Epson Coverplus Extended Warranty. For more information, please contact Epson customer support.

For Standard warranty terms & conditions, please refer to <https://www3.epson.com.hk/eservice/tcs.html>

## Bold, Bright, Beautiful...3LCD Technology

3LCD technology achieves bright, natural images and smooth, sharp video playback. No color break-up makes images gentle on the eyes.



Optical unit with high light-use efficiency

**EPSON**  
EXCEED YOUR VISION

**Better Products for a Better Future**

For more information on Epson's environmental programs, go to <http://eco.epson.com>

**Epson Hong Kong Limited**

Unit 715-723, 7/F Trade Square, 681 Cheung Sha Wan Road, Cheung Sha Wan, Kowloon, H.K.

\*Please call our sales hotlines for demonstration at our showroom.

**Epson Authorized Customer Service Centre**  
**Wah Fung Computer Services Ltd.**

Unit 901, 9/F, Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

HK Sales Hotline : (852) 2827 8711  
HK Technical Hotline : (852) 2827 8911  
Macau Hotline : (853) 2850 8065

**URL: [www.epson.com.hk](http://www.epson.com.hk)**

MAR17-01-PROJECTOR