

ULTRA LONG-LIFE.



Epson laser projectors. Enjoy up to 6.5 times the lifespan of a lamp.

When it comes to lasting performance and reliability, laser is lightyears ahead. With no lamp to replace, Epson laser projectors can operate for up to 20,000 hours with minimal maintenance. Combined with improved energy efficiency, this reduces the cost of ownership too, giving you dependable big-screen presentation without big budget demands.

See the range and make the change at epson.com.sg/laser-projectors



Scan the QR code to find out more




IT'S IN THE DETAILS.

EPSON
EXCEED YOUR VISION

BUSINESS AND HOME PROJECTORS GUIDE

COMPLETING ALL YOUR HOME
AND BUSINESSES NEEDS.

EPSON
EXCEED YOUR VISION

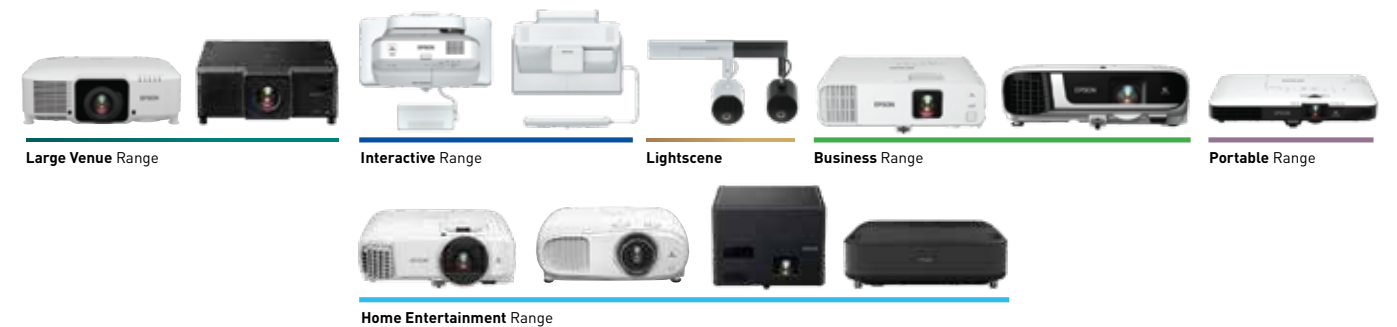

androidtv EpiqVision

*Leading Epson business and education projectors vs. leading 1-chip DLP® projectors, selected according to NPD data as of July 2015. Based on U.S. research conducted by Radius Research. Information correct at time of printing. Printed December 2020.

QUICK GUIDE

Model Number

MAIN SPECIFICATIONS	White Brightness
	Colour Brightness
	Resolution
	Contrast Ratio
	Keystone (V) / (H)
	Optical Zoom
	Auto Keystone
LAMP	Lamp Life (Normal/Eco)
INPUT TERMINAL	D-Sub15 (VGA)
	Composite Video (RCA)
	S-Video
	HDMI
	USB
	Audio Input (RCA/Stereo Mini Jack)
	MIC-Input
OUTPUT TERMINAL	Monitor-Out
	Audio-Out
NETWORK	Network (LAN RJ45)
	Wireless
CONTROL	RS232C
OTHERS	Power (Normal/Eco) Consumption
	Speaker Wattage
	Dimension Excluding Feet (D x W x H)
	Weight (Kg) *Without Accessories
	Optional Wireless Dongle
	Air Filter
	Lamp Model

ENTRY RANGE

			
EB-E500	EB-X500	EB-X51	EB-W06
3,300 lm	3,600 lm	3,800 lm	3,700 lm
3,300 lm	3,600 lm	3,800 lm	3,700 lm
XGA	XGA	XGA	WXGA
15,000:1	16,000:1	16,000:1	16,000:1
±30° (V) / ±30° (H)	±30° (V) / ±30° (H)	±30° (V) / ±30° (H)	±30° (V) / ±30° (H)
	1.2x	1.2x	1.2x
	(Vertical only)	(Vertical only)	(Vertical only)
6,000 / 12,000 Hrs	6,000 / 12,000 Hrs	6,000 / 12,000 Hrs	6,000 / 12,000 Hrs
1	1	1	1
	1	1	1
1	1	1	1
B x1	A x1 / B x1	A x1 / B x1	A x1 / B x1
	1 / 0	1 / 0	1 / 0
	Optional	Optional	Optional
327 / 225 w	327 / 225 w	327 / 225 w	327 / 225 w
2 w Mono	2 w Mono	2 w Mono	2 w Mono
234 x 302 x 77 mm	234 x 302 x 77 mm	234 x 302 x 77 mm	234 x 302 x 77 mm
2.4 kg	2.5 kg	2.5 kg	2.5 kg
	ELPAP11	ELPAP11	ELPAP11
ELPAF32	ELPAF32	ELPAF32	ELPAF32
ELPLP97	ELPLP97	ELPLP97	ELPLP97

PROJECT MODEL		PROJECT MODEL		PROJECT MODEL	
					
EB-W51	EB-FH52	EB-E01	EB-X06	EB-E10	
4,000 lm	4,000 lm	3,300 lm	3,600 lm	3,600 lm	
4,000 lm	4,000 lm	3,300 lm	3,600 lm	3,600 lm	
WXGA	Full HD	XGA	XGA	XGA	
16,000:1	16,000:1	15,000:1	16,000:1	15,000:1	
±30° (V) / ±30° (H)	±30° (V) / ±30° (H)	±30° (V) / ±30° (H)	±30° (V) / ±30° (H)	±30° (V) / ±30° (H)	
1.2x	1.6x		1.2x		
(Vertical only)	(Vertical only)		(Vertical only)		
6,000 / 12,000 Hrs	6,000 / 12,000 Hrs	6,000 / 12,000 Hrs	6,000 / 12,000 Hrs	6,000 / 12,000 Hrs	
1	1	1	1	1	
1	1		1		
1	2	1	1	1	
A x1 / B x1	A x1 / B x1	B x1	A x1 / B x1	B x1	
1 / 0	1 / 0		1 / 0		
Optional	Built-in (Support Screen Mirroring)		Optional		
327 / 225 w	327 / 225 w	327 / 225 w	327 / 225 w	327 / 225 w	
2 w Mono	2 w Mono	2 w Mono	2 w Mono	2 w Mono	
234 x 302 x 77 mm	282 x 309 x 90 mm	234 x 302 x 77 mm	234 x 302 x 77 mm	234 x 302 x 77 mm	
2.5	3.1 kg	2.4 kg	kg 2.4 kg	2.4 kg	
ELPAP11			ELPAP11		
ELPAF32	ELPAF54	ELPAF32	ELPAF32	ELPAF32	
ELPLP97	ELPLP97	ELPLP97	ELPLP97	ELPLP97	

QUICK GUIDE

Model Number

MAIN SPECIFICATIONS	White Brightness
	Colour Brightness
	Resolution
	Contrast Ratio
	Keystone (V) / (H)
	Optical Zoom
	Auto Keystone
LASER	Type
	Laser Life (Normal/Quiet)
LAMP	Lamp Life (Normal/Eco)
INPUT TERMINAL	D-Sub15 (VGA)
	Composite Video (RCA)
	HDMI
	USB
	Audio Input (RCA/Stereo Mini Jack)
	MIC-Input
OUTPUT TERMINAL	Monitor-Out
	Audio-Out
NETWORK	Network (LAN RJ45)
	Wireless
CONTROL	RS232C
OTHERS	Power (Normal/Eco) Consumption
	Speaker Wattage
	Dimension Excluding Feet (D x W x H)
	Weight (Kg) *Without Accessories
	Optional Wireless Dongle
	Air Filter
	Lamp Model

ENTRY RANGE



EB-972	EB-982W	EB-L200X	EB-L200W	EB-L200F
4,100 lm	4,200 lm	4,200 lm	4,200 lm	4,500 lm
4,100 lm	4,200 lm	4,200 lm	4,200 lm	4,500 lm
XGA	WXGA	XGA	WXGA	FHD
16,000:1	16,000:1	>2,500,000:1	>2,500,000:1	>2,500,000:1
±30° (V) / ±30° (H)	±30° (V) / ±30° (H)	±30° (V) / ±30° (H)	±30° (V) / ±30° (H)	±30° (V) / ±30° (H)
1.6x	1.6x	1.62x	1.62x	1.62x
(Vertical only)	(Vertical only)	(Vertical only)	(Vertical only)	(Vertical only)
6,500 / 17,000 Hrs	6,500 / 17,000 Hrs	20,000 Hrs	20,000 Hrs	20,000 Hrs
2	2	2	2	2
1	1	1	1	1
2	2	2	2	2
A x1 / B x1	A x1 / B x1	A x1 / B x1	A x1 / B x1	A x1 / B x1
1 / 2	1 / 2	1 / 2	1 / 2	1 / 2
1	1	1	1	1
1	1	1	1	1
1	1	1	1	1
1	1	1	1	1
Optional	Optional	Built-in (Support Screen Mirroring)	Built-in (Support Screen Mirroring)	Built-in (Support Screen Mirroring)
1	1	1	1	1
327 / 225 w	327 / 225 w	254 / 193 w	254 / 193 w	254 / 193 w
16 w Mono	16 w Mono	16 w Mono	16 w Mono	16 w Mono
282 x 309 x 90 mm	282 x 309 x 90 mm	299 x 325 x 90 mm	299 x 325 x 90 mm	299 x 325 x 90 mm
3.1 kg	3.1 kg	4.1 kg	4.1 kg	4.1 kg
ELPAP11	ELPAP11	ELPAP11	ELPAP11	ELPAP11
ELPAF54	ELPAF54	ELPAF60	ELPAF60	ELPAF60
ELPLP97	ELPLP97			

BUSINESS
PROJECTORS

QUICK GUIDE

Model Number

MAIN SPECIFICATIONS	White Brightness
	Colour Brightness
	Resolution
	Contrast Ratio
	Keystone (V) / (H)
	Optical Zoom
	Auto Keystone
LAMP	Lamp Life (Normal/Eco)
LASER	Type
	Laser Life (Normal/Quiet)
INPUT TERMINAL	D-Sub15 (VGA)
	Composite Video (RCA)
	HDMI
	HD BaseT
	USB
	Audio Input (RCA/Stereo Mini Jack)
OUTPUT TERMINAL	Monitor-Out
	Audio-Out
NETWORK	Network (LAN RJ45)
	Wireless
CONTROL	RS232C
OTHERS	Power (Normal/Eco) Consumption
	Speaker Wattage
	Dimension Excluding Feet (D x W x H)
	Weight (Kg) *Without Accessories
	Optional Wireless Dongle
	Air Filter
	Lamp Model

ULTRA PORTABLE SERIES			MID SIZED ROOMS			
GESTURE PRESENTER	GESTURE PRESENTER	SCREEN MIRRORING	SCREEN MIRRORING			
						
EB-1785W	EB-1795F	EB-2265U	EB-2155W	EB-2065	EB-L510U	EB-L610U
3,200 lm	3,200 lm	5,500 lm	5,000 lm	5,500 lm	5,000 lm	6,000 lm
3,200 lm	3,200 lm	5,500 lm	5,000 lm	5,500 lm	5,000 lm	6,000 lm
WXGA	Full HD	WUXGA	WXGA	XGA	WUXGA	WUXGA
☾ 10,000:1	☾ 10,000:1	☾ 15,000:1	☾ 15,000:1	☾ 15,000:1	☾ >2,500,000:1	☾ >2,500,000:1
±45° (V) / ±30° (H)	±45° (V) / ±30° (H)	±30° (V) / ±30° (H)	±30° (V) / ±30° (H)	±30° (V) / ±30° (H)	±30° (V) / ±30° (H)	±30° (V) / ±30° (H)
1.2x	1.2x	1.6x	1.6x	1.6x	1.6x	1.6x
●	●	●	●	●	● (Vertical only)	● (Vertical only)
4,000 / 7,000 Hrs	4,000 / 7,000 Hrs	5,000 / 10,000 Hrs	5,000 / 10,000 Hrs	5,000 / 10,000 Hrs		
						
					20,000 Hrs	20,000 Hrs
1	1	2	2	2	2	2
1	1	1	1	1		
1 (Support MHL)	1 (Support MHL)	2 (1 x support MHL)	2 (1 x support MHL)	2 (1 x support MHL)	2	2
		1			1	1
A x1 / B x1	A x1 / B x1	A x1 / B x1	A x1 / B x1	A x1 / B x1	A x1 / B x1	A x1 / B x1
0 / 1	0 / 1	1 / 2	1 / 2	1 / 2	0 / 2	0 / 2
		1 Share with Computer 2	1 Share with Computer 2	1 Share with Computer 2	1 Share with Computer 2	1 Share with Computer 2
		1	1	1	1	1
		1	1	1	1	1
Built-in (Support Screen Mirroring)	Built-in (Support Screen Mirroring)	Optional	Optional	Optional	Optional	Built-in (Support Screen Mirroring)
		1	1	1	1	1
295 / 208 w	295 / 208 w	425 / 323 w	405 / 323 w	425 / 323 w	322 / 244 w	353 / 265 w
1 w Mono	1 w Mono	16 w Mono	16 w Mono	16 w Mono	10 w Mono	10 w Mono
213 x 292 x 53 mm	213 x 292 x 53 mm	291 x 377 x 110 mm	219 x 377 x 101 mm	219 x 377 x 101 mm	304 x 440 x 120 mm	304 x 440 x 120 mm
1.81 kg	1.83 kg	4.7 kg	4.3 kg	4.4 kg	8.5 kg	8.5 kg
		ELPAP10	ELPAP10	ELPAP10	ELPAP10	
ELPAF53	ELPAF53	ELPAF41	ELPAF41	ELPAF41	ELPAF56	ELPAF56
ELPLP94	ELPLP94	ELPLP95	ELPLP95	ELPLP95		

BUSINESS PROJECTORS

QUICK GUIDE

Model Number

MAIN SPECIFICATIONS	White Brightness
	Colour Brightness
	Resolution
	Contrast Ratio
	Keystone (V) / (H)
	Auto Keystone
LAMP	Lamp Life (Normal/Eco/Eco2)
LASER	Type
	Laser Life (Normal/Quiet)
INPUT TERMINAL	D-Sub15 (VGA)
	Composite Video (RCA)
	S-Video
	HDMI
	HD BaseT
	USB
	Audio Input (RCA/Stereo Mini Jack)
	MIC-Input
OUTPUT TERMINAL	Monitor-Out
	Audio-Out
NETWORK	Network (LAN RJ45)
	Wireless
CONTROL	RS232C
OTHERS	Power (Normal/Eco) Consumption
	Speaker Wattage
	Dimension Excluding Feet (D x W x H)
	Weight (Kg) *Without Accessories
	Optional Wireless Dongle
	Air Filter
	Lamp Model

SHORT THROW				
PEN INTERACTIVE				
				
EB-L200SX	EB-L200SW	EB-536Wi	EB-530	EB-535W
3,600 lm	3,800 lm	3,400 lm	3,200 lm	3,400 lm
3,600 lm	3,800 lm	3,400 lm	3,200 lm	3,400 lm
XGA	WXGA	WXGA	XGA	WXGA
☾ >2,500,000:1	☾ >2,500,000:1	☾ 16,000:1	☾ 16,000:1	☾ 16,000:1
±15° (V) / ±15° (H)	±15° (V) / ±15° (H)	±7° (V) / ±5° (H)	±15° (V) / ±15° (H)	±15° (V) / ±15° (H)
● (Vertical only)	● (Vertical only)	● (Vertical only)		
		5,000 / 10,000 / – Hrs	5,000 / 10,000 / – Hrs	5,000 / 10,000 / – Hrs
				
20,000 Hrs	20,000 Hrs			
2	2	2	2	2
1	1	1	1	1
		1	1	1
2	2	1	1	1
A x1 / B x1	A x1 / B x1	A x1 / B x1	A x1 / B x1	A x1 / B x1
1 / 2	1 / 2	1 / 2	1 / 2	1 / 2
1	1	1	1	1
1	1	1	1	1
1	1	1	1	1
1	1	1	1	1
1	1	1	1	1
Built-in (Support Screen Mirroring)	Built-in (Support Screen Mirroring)	Optional	Optional	Optional
1	1	1	1	1
254 / 193 w	254 / 193 w	298 / 221 w	298 / 221 w	298 / 221 w
16 w Mono	16 w Mono	16 w Mono	16 w Mono	16 w Mono
337 x 325 x 90 mm	337 x 325 x 90 mm	314.5 x 344 x 94 mm	314.5 x 344 x 94 mm	314.5 x 344 x 94 mm
4.5 kg	4.5 kg	3.9 kg	3.7 kg	3.7 kg
ELPAP11	ELPAP11	ELPAP10	ELPAP10	ELPAP10
ELPAF60	ELPAF60	ELPAF47	ELPAF47	ELPAF47
		ELPLP87	ELPLP87	ELPLP87

MAIN SPECIFICATIONS	White Brightness
	Colour Brightness
	Native Resolution
	Contrast Ratio
	Keystone (V) / (H)
	Optical Zoom
LAMP	Auto Keystone
	Lamp Life (Normal/Eco)
LASER	Type
	Laser Life (Normal/Quiet)
INPUT TERMINAL	D-Sub15 (VGA)
	HDMI
	SDI (BNC)
	HD BaseT
	USB
	Audio Input (RCA/Stereo Mini Jack)
	SD Card Slot
OUTPUT TERMINAL	Monitor-Out
	Audio-Out
NETWORK	Network (LAN RJ45)
	Wireless
CONTROL	RS232C
OTHERS	Power (Normal/Eco) Consumption
	Speaker Wattage
	Dimension Excluding Feet (D x W x H)
	Weight (Kg) *Without Accessories
	Optional Wireless Dongle
	Air Filter
	Lamp Model

LIGHTSCENE			
			
EB-W50	EB-U50	EV-100/105	EB-800F/805F
3,800 lm	3,700 lm	2,000 lm	5,000 lm
3,800 lm	3,700 lm	2,000 lm	5,000 lm
WXGA	WUXGA	WXGA	Full HD
☾ 20,000:1	☾ 16,000:1	☾ >2,500,000:1	☾ >2,500,000:1
±30° (V) / ±30° (H)	±30° (V) / ±30° (H)	±45° (V) / ±40° (H)	±3° (V) / ±3° (H)
1.2x	1.2x	1.58x	
● (Vertical only)	● (Vertical only)		
10,000 / 17,000 Hrs	10,000 / 17,000 Hrs		
			
		20,000 Hrs	20,000 Hrs
2	2		2
2	2	1	3
		1 (SD/HD & 3G-SDI)	
			1
A x1 / B x1	A x1 / B x1	A x1 / B x1	A x2 / B x1
0 / 2	0 / 2		0 / 3
		●	
1	1		1
1	1	1	1
1	1	1	1
Optional	Optional	Built-in	Optional
1	1		1
285 / 218 w	285 / 218 w	170 / 118 w	366 / 262 w
5 w Mono	5 w Mono		8 w x 8 w Stereo
248 x 364 x 87 mm	248 x 364 x 87 mm	Projection unit: 260 x 175 mm Power supply unit (without cable cover) 110 x 361 x 65 mm	375 x 458 x 209.5 mm
3.0 kg	3.1 kg	5.0 kg (Excluding Direct Mount)	9.4 kg (Excluding Cable Cover)
ELPAP10	ELPAP10		ELPAP11
ELPAF59	ELPAF59		ELPAF56
ELPLP97	ELPLP97		

BUSINESS
PROJECTORS

QUICK GUIDE

Model Number	
MAIN SPECIFICATIONS	White Brightness
	Colour Brightness
	Resolution
	Contrast Ratio
	Keystone (V) / (H)
	Auto Keystone
LAMP	Lamp Life (Normal/Eco/Eco2)
LASER	Type
	Laser Life (Normal/Quiet)
INPUT TERMINAL	D-Sub15 (VGA)
	Composite Video (RCA)
	S-Video
	HDMI
	HD BaseT
	USB
	Audio Input (RCA/Stereo Mini Jack)
	MIC-Input
OUTPUT TERMINAL	Monitor-Out
	Audio-Out
NETWORK	Network (LAN RJ45)
	Wireless
CONTROL	RS232C
OTHERS	Power (Normal/Eco) Consumption
	Speaker Wattage
	Dimension Excluding Feet (D x W x H)
	Weight (Kg) *Without Accessories
	Optional Wireless Dongle
	Air Filter
	Lamp Model

ULTRA SHORT THROW			
			
EB-685W	EB-725W	EB-735F	
3,500 lm	4,000 lm	3,600 lm	
3,500 lm	4,000 lm	3,600 lm	
WXGA	WXGA	Full HD	
14,000:1	>2,500,000:1	>2,500,000:1	
±3° (V) / ±3° (H)	±3° (V) / ±3° (H)	±3° (V) / ±3° (H)	
5,000 / 10,000 / 9,000 Hrs			
			
	20,000 Hrs	20,000 Hrs	
2	2	2	
1	1	1	
3	3	3	
A x1 / B x1	A x2 / B x1	A x2 / B x1	
0 / 3	0 / 3	0 / 3	
1	1	1	
1 Share with Computer 2	1 Share with Computer 2	1 Share with Computer 2	
1	1	1	
1	1	1	
Optional	Built-in (Support Screen Mirroring)	Built-in (Support Screen Mirroring)	
1	1	1	
354 / 309 w	255 / 197 w	255 / 197 w	
16 w Mono	16 w Mono	16 w Mono	
400 x 367 x 149 mm	395 x 356 x 133 mm	395 x 356 x 133 mm	
5.7 kg	5.7 kg	5.7 kg	
ELPAP10	ELPAP11	ELPAP11	
ELPAF49	ELPAF60	ELPAF60	
ELPLP97			

ULTRA SHORT THROW INTERACTIVE				
PEN INTERACTIVE	TOUCH INTERACTIVE	OPTIONAL TOUCH INTERACTIVE	TOUCH INTERACTIVE	TOUCH INTERACTIVE
				
EB-685Wi	EB-695Wi	EB-725Wi	EB-735Fi	EB-1485Fi
3,500 lm	3,500 lm	4,000 lm	3,600 lm	5,000 lm
3,500 lm	3,500 lm	4,000 lm	3,600 lm	5,000 lm
WXGA	WXGA	WXGA	Full HD	Full HD
14,000:1	14,000:1	>2,500,000:1	>2,500,000:1	>2,500,000:1
±3° (V) / ±3° (H)	±3° (V) / ±3° (H)	±3° (V) / ±3° (H)	±3° (V) / ±3° (H)	±3° (V) / ±3° (H)
5,000 / 10,000 / 9,000 Hrs	5,000 / 10,000 / 9,000 Hrs			
				
		20,000 Hrs	20,000 Hrs	20,000 Hrs
2	2	2	2	2
1	1	1	1	1
3	3	3	3	3
				1
A x1 / B x1	A x1 / B x1	A x2 / B x2	A x2 / B x2	A x2 / B x2
0 / 3	0 / 3	0 / 3	0 / 3	0 / 3
1	1	1	1	1
1 Share with Computer 2	1 Share with Computer 2	1 Share with Computer 2	1 Share with Computer 2	1
1	1	1	1	1
1	1	1	1	1
Optional	Optional	Built-in (Support Screen Mirroring)	Built-in (Support Screen Mirroring)	Built-in (Support Screen Mirroring)
1	1	1	1	1
354 / 309 w	354 / 309 w	255 / 197 w	255 / 197 w	366 / 262 w
16 w Mono	16 w Mono	16 w Mono	16 w Mono	8 w x 8 w Stereo
400 x 367 x 149 mm	400 x 367 x 149 mm	395 x 356 x 133 mm	395 x 356 x 133 mm	375 x 458 x 209.5 mm
5.8 kg	5.8 kg	5.8 kg	5.8 kg	9.3 kg
ELPAP10	ELPAP10	ELPAP11	ELPAP11	ELPAP11
ELPAF49	ELPAF49	ELPAF60	ELPAF60	ELPAF56
ELPAP91	ELPAP91			

BUSINESS
PROJECTORS

QUICK GUIDE

Model Number

MAIN SPECIFICATIONS	White Brightness
	Colour Brightness
	Resolution
	Contrast Ratio
	Keystone (V) / (H)
	Optical Zoom
	4K Enhancement
LAMP	Lamp Life (Normal/Eco)
LASER	Type
	Laser Life (Normal/Quiet)
INPUT TERMINAL	D-Sub15 (VGA)
	HDMI
	DVI-D
	5BNC
	SDI (BNC)
	HD BaseT
	USB
	Audio Input (RCA/Stereo Mini Jack)
OUTPUT TERMINAL	Monitor-Out
	Audio-Out
NETWORK	Network (LAN RJ45)
	Wireless
CONTROL	RS232C
	Remote (Stereo Mini)
OTHERS	Power (Normal/Eco) Consumption
	Speaker Wattage
	Dimension Excluding Feet (D x W x H)
	Weight (Kg) *Without Accessories
	Optional Wireless Dongle
	Air Filter
	Lamp Model

LARGE VENUES			
			
EB-G7200WNL	EB-G7805NL	EB-G7905UNL	
7,500 lm	8,000 lm	7,000 lm	
7,500 lm	8,000 lm	7,000 lm	
WXGA	XGA	WUXGA	
☾ 50,000:1	☾ 50,000:1	☾ 50,000:1	
±45° (V) / ±30° (H)	±45° (V) / ±30° (H)	±45° (V) / ±30° (H)	
1.6x *Using ELPLM08 lens	1.6x *Using ELPLM08 lens	1.6x *Using ELPLM08 lens	
3,000 / 4,000 Hrs Portrait 2,000 Hrs	3,000 / 4,000 Hrs Portrait 2,000 Hrs	3,000 / 4,000 Hrs Portrait 2,000 Hrs	
1	1	1	
1 (With HDCP 2.2)	1 (With HDCP 2.2)	1 (With HDCP 2.2)	
1	1	1	
1	1	1	
1	1	1	
A x1 / B x1	A x1 / B x1	A x1 / B x1	
0 / 3	0 / 3	0 / 3	
1	1	1	
1	1	1	
1	1	1	
Optional	Optional	Optional	
1	1	1	
1	1	1	
572 / 477 w	572 / 477 w	572 / 477 w	
10 w	10 w	10 w	
425 x 525 x 164 mm	425 x 525 x 164 mm	425 x 525 x 164 mm	
12.9 kg	12.9 kg	12.9 kg	
ELPP10	ELPP10	ELPP10	
ELPAF30	ELPAF30	ELPAF30	
ELPLP93	ELPLP93	ELPLP93	

LARGE VENUES				
				
EB-L1060UNL	EB-L1070UNL	EB-L1495UNL	EB-L1505UHNL	EB-L1515SNL
6,000 lm	7,000 lm	9,000 lm	12,000 lm	12,000 lm
6,000 lm	7,000 lm	9,000 lm	12,000 lm	12,000 lm
WUXGA	WUXGA	WUXGA	WUXGA	SXGA+
☾ >2,500,000:1	☾ >2,500,000:1	☾ >2,500,000:1	☾ >2,500,000:1	☾ >2,500,000:1
±45° (V) / ±30° (H)	±45° (V) / ±30° (H)	±45° (V) / ±30° (H)	±45° (V) / ±30° (H)	±45° (V) / ±30° (H)
1.6x *Using ELPLM08 lens	1.6x *Using ELPLM08 lens	1.6x *Using ELPLM15 lens	1.6x *Using ELPLM15 lens	1.6x *Using ELPLM15 lens
				
20,000 Hrs	20,000 Hrs	20,000 Hrs	20,000 Hrs	20,000 Hrs
1	1	1	1	1
1 (With HDCP 2.2)	1 (With HDCP 2.2)	1	1	1
1	1	1	1	1
1	1	1	1	1
		1	1	
1	1	1	1	1
A x1 / B x1	A x1 / B x1	A x1 / B x1	A x1 / B x1	A x1 / B x1
0 / 3	0 / 3	0 / 3	0 / 3	0 / 3
1	1	1	1	1
1	1	1	1	1
1	1	1	1	1
Optional	Optional	Optional	Optional	Optional
1	1	1	1	1
1	1	1	1	1
345 / 252 w	416 / 299 w	626 / 512 w	908 / 597 w	908 / 597 w
436 x 545 x 164 mm	436 x 545 x 164 mm	492 x 586 x 185 mm	492 x 586 x 185 mm	492 x 586 x 185 mm
15.6 kg	15.6 kg	21.9 kg	21.9 kg	21.9 kg
ELPP10	ELPP10	ELPP10	ELPP10	ELPP10
ELPAF46	ELPAF46	ELPAF51	ELPAF51	ELPAF51

BUSINESS
PROJECTORS

QUICK GUIDE

Model Number

MAIN SPECIFICATIONS	White Brightness
	Colour Brightness
	Resolution
	Contrast Ratio
	Keystone (V) / (H)
	Optical Zoom
	4K Enhancement
LASER	Type
	Laser Life (Normal/Quiet)
INPUT TERMINAL	D-Sub15 (VGA)
	HDMI
	DVI-D
	5BNC
	SDI (BNC)
	Display Port
	HD BaseT
	USB
	Audio Input (RCA/Stereo Mini Jack)
	SD Card Slot
OUTPUT TERMINAL	Monitor-Out
	Audio-Out
	SDI (BNC) Out
NETWORK	Network (LAN RJ45)
	Wireless
CONTROL	RS232C
	Remote (Stereo Mini)
OTHERS	Power (Normal/Eco) Consumption
	Dimension Excluding Feet (D x W x H)
	Weight (Kg) *Without Accessories
	Optional Wireless Dongle
	Air Filter

LARGE VENUES	
	
EB-L1715SNL	EB-L1755UNL
15,000 lm	15,000 lm
15,000 lm	15,000 lm
SXGA+	WUXGA
>2,500,000:1	>2,500,000:1
±45° (V) / ±30° (H)	±45° (V) / ±30° (H)
1.6x *Using ELPLM15 lens	1.6x *Using ELPLM15 lens
20,000 Hrs	20,000 Hrs
1	1
1	1
1	1
1	1
	1
1	1
A x1 / B x1	A x1 / B x1
0 / 3	0 / 3
1	1
1	1
1	1
Optional	Optional
1	1
1	1
1024 / 647 w	1024 / 647 w
492 x 586 x 185 mm	492 x 586 x 185 mm
22.2 kg	22.3 kg
ELPAP10	ELPAP10
ELPAF51	ELPAF51

LARGE VENUES		
		
EB-L12000QNL	EB-L20000UNL	EB-L30000UNL
12,000 lm	20,000 lm	30,000 lm
12,000 lm	20,000 lm	30,000 lm
4K	WUXGA	WUXGA
>2,500,000:1	>2,500,000:1	>2,500,000:1
±45° (V) / ±30° (H)	±45° (V) / ±30° (H)	±45° (V) / ±30° (H)
1.6x *Using ELPLM15 lens	1.6x *Using ELPLM15 lens	1.35x *Using ELPLM12 lens
20,000 Hrs	20,000 Hrs	20,000 Hrs
1	1	1
Optional (ELPIF 01)	Optional (ELPIF 01)	1
Optional (ELPIF 01)	Optional (ELPIF 01)	1
	1	1
Optional (ELPIF 02)	1 (SD/HD & 3G-SDI)	1 (SD/HD & 3G-SDI)
Optional (ELPIF 03)	Optional (ELPIF 03)	
1	1	1
A x1 / B x1	A x1 / B x1	A x1 / B x1
1	1	1
Optional (ELPIF 02)	1	1
1	1	1 (Artnet)
Built-in	Built-in	Optional
1	1	1
1	1	1
1741 / 1030 w	1860 / 1123 w	2390 / 1670 w
720 x 620 x 280 mm	720 x 620 x 280 mm	860 x 936 x 378.5 mm
51.3 kg	49.6 kg	69.9 kg
		ELPAP10
ELPAF58	ELPAF58	ELPAF52

HOME PROJECTORS

QUICK GUIDE

Model Number

MAIN SPECIFICATIONS	White Brightness
	Colour Brightness
	Resolution
	Contrast Ratio
	Keystone (V) / (H)
	Auto Keystone
LASER	Type
	Laser Life (High/Medium/Eco)
INPUT / OUTPUT TERMINAL	HDMI
	USB
	Audio Input
	Audio Output
NETWORK	Network (LAN RJ45)
	Wireless (802.11 a/b/g/n)
CONTROL	RS232C
FEATURES	3D
	2D - 3D Conversion
	3D Depth Adjustment
	Frame Interpolation
	Super Resolution
OTHERS	Power (Normal/Eco) Consumption
	Speaker Wattage
	Dimension Excluding Feet (D x W x H)
	Weight (Kg) *Without Accessories
	Air Filter
	Lamp Model

EPIQVISION		EPIQVISION		EPIQVISION		EPIQVISION	
	 androidtv	 androidtv	 androidtv	 4K PRO-UHD			
EpiqVision Mini EF-11	EpiqVision Mini EF-12	EpiqVision Mini EF-100BATV & EF-100WATV	EpiqVision Ultra EH-LS300B	EpiqVision Ultra EH-LS500B SMP			
1,000 lm	1,000 lm	2,000 lm	3,600 lm	4,000 lm			
1,000 lm	1,000 lm	2,000 lm	3,600 lm	4,000 lm			
Full HD	Full HD	WXGA	Full HD	Full HD			
>2,500,000:1	>2,500,000:1	>2,500,000:1	>2,500,000:1	>2,500,000:1			
±34° (V) / ±40° (H)	±34° (V) / ±40° (H)	±45° (V) / ±40° (H)		±3° (V) / ±3° (H)			
(Vertical only)	(Vertical & Horizontal)	(Vertical only)					
							
20,000 Hrs	20,000 Hrs	20,000 Hrs	20,000 Hrs	20,000 Hrs			
1 (HDCP 1.4)	2 (HDCP 2.3)	1	2 (HDCP 2.3)	3 (HDCP 2.2)			
A x1 / B x1	A x1 / B x1	A x1 / B x1	A x1 / B x1	A x1 / B x1 (Mini)			
1	1	1	1	1			
				1			
Screen Mirroring only	Smart Media Player Function	Smart Media Player Function	Smart Media Player Function	Smart Media Player Function			
				1			
102 / 73 w	102 / 73 w	172 / 115 w	278 / 179 w	366 / 262 w			
1.5 w Mono (2 ways)	5 w Stereo (Sound by Yamaha)	5 w Mono with Enclosure	Total: 20 w 2.1ch Satellite x2, Woofer x1 (Sound by Yamaha)	10 w x 10 w Stereo			
175 x 175 x 58 mm	175 x 175 x 128 mm	227 x 210 x 88 mm	400 x 467 x 133 mm	375 x 458 x 209.5 mm			
1.2 kg	2.1 kg	2.7 kg	7.2 kg	9.5 kg (Excluding Cable Cover)			
ELPAF61	ELPAF61	ELPAF57	ELPAF60	ELPAF56			

HOME PROJECTORS

QUICK GUIDE

Model Number		EH-TW750	EH-TW5820	EH-TW7000	EH-TW9400
MAIN SPECIFICATIONS	White Brightness	3,400 lm	2,700 lm	3,000 lm	2,600 lm
	Colour Brightness	3,400 lm	2,700 lm	3,000 lm	2,600 lm
	Resolution	Full HD	Full HD	Full HD	Full HD
	Contrast Ratio	16,000:1	70,000:1	40,000:1	1,200,000:1
	Keystone (V) / (H)	±30° (V) / ±30° (H)	±30° (V) / ±30° (H)	±30° (V) / ±30° (H)	±30° (V)
	Auto Keystone	(Vertical only)	(Vertical only)		
LAMP	Lamp Life	Normal / Eco 6,000 / 12,000 Hrs	Normal / Eco 4,500 / 7,500 Hrs	High / Medium / Eco 3,500 / 4,000 Hrs / 5,000 Hrs	High / Medium / Eco 3,500 / 4,000 Hrs / 5,000 Hrs
INPUT / OUTPUT TERMINAL	D-Sub15 (VGA)	1			1
	Composite Video (RCA)	1			
	HDMI	2	1	2 (HDCP 2.2)	2 (HDCP 2.2)
	USB	A x1 / B x1	A x0 / B x1	A x2 / B x1	A x2 / B x1
	Audio Input	1			
	Audio Output	1	1	1	
NETWORK	Network (LAN RJ45)				1
	Wireless (802.11 a/b/g/n)	Built-in		Optional	Optional
CONTROL	RS232C				1
	Trigger Out (12V)				1
FEATURES	3D				
	2D - 3D Conversion				
	3D Depth Adjustment				
	Frame Interpolation				
	Super Resolution				
	Cinema Filter				
	Split Screen				
	Picture-in-Picture				
LENS SHIFT	Vertical Range (V)		+45° – 60°	±60°	±96.3°
	Horizontal Range (H)			±24°	±47.1°
OTHERS	Power (Normal/Eco) Consumption	327 / 225 w	297 / 227 w	368 / 280 w	355 / 271 w
	Speaker Wattage	2 w Mono	10 w Mono with Enclosure		
	Dimension Excluding Feet (D x W x H)	249 x 302 x 87 mm	308 x 309 x 107 mm	310 x 410 x 157 mm	450 x 520 x 170 mm
	Weight (Kg) *Without Accessories	2.8 kg	3.8 kg	6.6 kg	11.2 kg
	Air Filter	ELPAF32	ELPAF55	ELPAF39	ELPAF39
	Lamp Model	ELPLP97	ELPLP97	ELPLP85	ELPLP89

HOME ENTERTAINMENT



**PROJECTOR WISHES
COME TRUE.**

EPSON 3LCD PROJECTORS

1-CHIP PROJECTORS



 
WHITE 3000 LUMENS

 COLOUR 3000 LUMENS



**TRUE
BRIGHTNESS**



 
WHITE 3000 LUMENS



COLOUR 430 LUMENS**



LIGHT SOURCE → **PRISM**



**TRUE
COMFORT**



The diagram illustrates the components of a color display. On the left, a speaker icon represents the **LIGHT SOURCE**. An arrow points from the light source to a **ROTATING COLOUR WHEEL** on the right. The wheel is divided into three colored segments: red, green, and blue. A curved arrow above the wheel indicates its rotation.



**TRUE
REALISM**



**SMALLER
COLOUR
RANGE**



Find out more at www.epson.co.id/truecolours



**TRUE
COLOURS**

Brighter, vivid projection from Epson.

9 out of **10** PEOPLE
PREFER IMAGES FROM
EPSON PROJECTORS*



IT'S IN THE DETAILS.

With 3LCD panels, every projection gives you spectacular true colours.

* Leading Epson business and education projectors vs. leading 1-chip DLP® projectors, selected according to NPD data as of July 2015. Based on U.S. research conducted by Radius Research.

** These lumen statistic can be found at www.colorlightoutput.com.

1 Color brightness(color light output) in brightest mode, measured by a third-party lab in accordance with IDMS 15.4. Color brightness will vary depending on usage conditions. Top-selling Epson 3LCD projectors versus top-selling 1-chip DLP® projectors based on NPD sales data for May 2017 – April 2018.

2 Gamut volume in brightest mode, measured by a third-party lab in 3D in the CIE L*a*b* coordinate space. Top-selling Epson 3LCD projectors versus top-selling 1-chip DLP® projectors based on NPD sales data for May 2017 – April 2018.