BUSINESS LASER PROJECTORS EB-L200F/L200W/L200SW

FULL-HD^{*} CLARITY & POWER-PACKED FUNCTIONS.



Bringing a game-changer to the tables with Epson EB-L200 series of projectors.

Get ready to triumph with persuasive and vivid projections during conferences and lessons. Optimised for education institutions and corporate sectors, amplify your messages with the crisply detailed Full-HD* display. The EB-L200 series is power-packed with up to 20,000[^] maintenance-free laser light source hours and built-in wireless integration for ease of use.



Superior Image Quality

A dynamic Full-HD* viewing experience, delivering vibrant and sharp images up to 4,500 lumens with the laser light source.

Ease of Connectivity

Connect easily with built-in connectivity and high portability to facilitate move between classrooms and meeting rooms.

Peace-of-mind Reliability

Highly reliable projectors delivering up to 20,000 hours of maintenance-free laser light source.

* For EB-L200F only. Pixel shifting technology achieves Full HD resolution on screen. #Source: Futuresource Consulting. ^ Approximate time until brightness decreases 50% from first usage. Measured by acceleration test assuming use of 0.04 - 0.20 mg/m³ of particulate matter. Time varies depending on usage conditions and environments

A world of difference with visual brilliance



Impressively consistent with sharp and bright projections, performance-focused functions up to Full-HD Display*, generous light output, massive screen capability and built-in connectivity functions, with steadfast reliability.



Up to Full-HD Resolution*

Bedazzle your audience with bright, dynamic, and engaging content with the Full-HD resolution* (1080p).



Bright Image Quality

Laser light source produces up to 4,500 lumens of spectacular colour/white brightness.



Lasting Reliability Present with confidence with 20.000 hours² of maintenancefree laser light source.

* For EB-L200F only. Pixel shifting technology achieves Full HD resolution on screen. Resolution for EB-L200W is WXGA, EB-L200SW is WXGA.

- Color brightness (color light output) and white brightness (white light output) will vary depending on usage conditions. Color light output measured in accordance with IDMS 15.4; white light output measured in accordance with ISO 21118. Approximate time until brightness decreases 50% from first usage. Measured by acceleration test assuming use of 0.04 0.20 mg/m3 of particulate matter.
- Time varies depending on usage conditions and environments



Surpassing expectations for classrooms and office projectors.



Wireless Integration

Ease of connection with built-in connectivity through Wi-Fi and Miracast support.



Compact and Flexible Lightweight and portable, it is easy to carry³ between classrooms and meeting rooms wherever needed.



Screen Size Flexibility


Up to 1.6X optical zoom provides the flexibility to adjust the projector screen size while maintaining its quality.

Connect and inspire every learning experience.

Upgrade your classrooms today with the Epson EB-L200 series! Eliminate lesson interruptions with long-lasting laser light source, producing richer projections that ensure clarity no matter where students are seated.

11

Lesson contents can now be shared efficiently, enabling lessons to be more fruitful and memorable.




Crisp and Immerisve

Students seated anywhere in the classroom can view lessons clearly thanks to the flexible display sizes, up to 500 inches*, on any surface.



Remarkable Contrast Ratio

With the astounding 2,500,000:1 dynamic contrast ratio, lessons can be communicated in richer and bolder images.

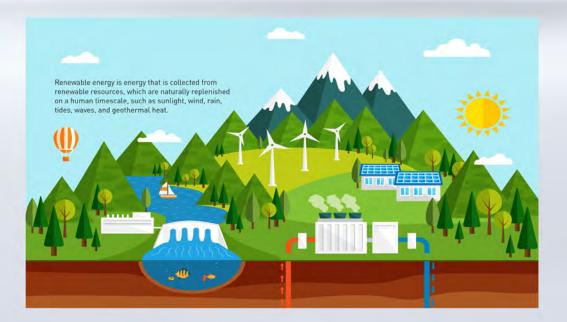





Super Resolution with Image Enhancement

Improve perceived image resolution with the detail enhancement function. Now, you can enjoy better image quality.



Split Screen Function


A split screen function enables the simultaneous projection of up to four images from separate devices through both wired and wireless connections on a single screen.

Superior Image Quality

Enjoy a dynamic viewing experience with Full-HD* resolution on-screen coupled with laser light source. Deliver vibrant and high-resolution image displays from your devices.


* For EB-L200F. Pixel shifting technology achieves Full HD resolution on screen.


How can a projector with better resolution aid your presentation?

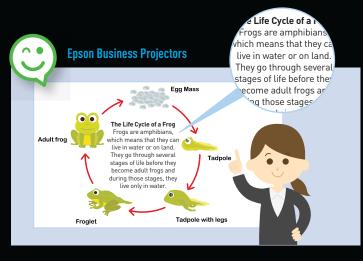

Resolution:

EB-L200F Full-HD (1080p) EB-L200W EB-L200SW WXGA (1280 x 800) WXGA (1024 x 768)



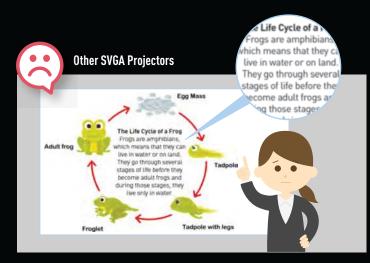

Resolution:

Other Projectors SVGA (800 x 600)



Blurry images with less legible text Less information allowed on the screen Dull and challenging viewing experience

Epson projector gives you:



Brighter Images

With brighter images of up to 4,500lm, it will allow clear image even in ambient light conditions from fluorescent lamps or sunlight from windows.



Larger Images


With a wide projection screen size of up to 500 inches*, you enjoy bigger image projection for greater visibility.

* For EB-L200F.

Laser Light Technology

Bright and Compact

Using Epson's very own original designed fixed phosphor unit, coupled with the innovative optimized design, the L200 series is now more compact yet producing brighter and sharper images. Thanks to the new heatsink design, the L200 series has better heat conductivity, resulting in improved heat resistance, all while delivering high-quality vivid images.

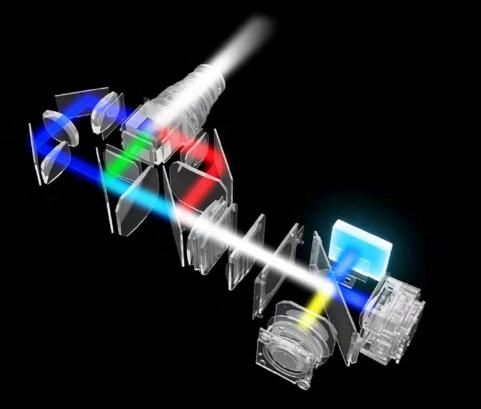




Cost Effective

Epson's unique laser technology sees the L200 series having 20,000 hours* of maintenance-free laser light source. Enjoy peace of mind when using these highly reliable laser projectors thanks to the innovative fixed phosphor unit, giving your devices durability and long-lasting life.

Maintenance period of laser and lamp

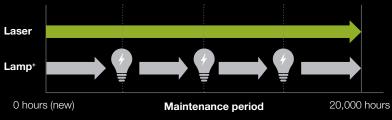

* Compared with other conventional lamp projector that has lamp life of 5,000 hours.

⁵ Approximate time until brightness decreases 50% from first usage. Measured by acceleration test assuming use of 0.04 - 0.20 mg/m3 of particulate matter. Time varies depending on usage conditions and environments.

🚩 🕴 Eco Features

replacements

- Uses just 0.5W of power in standby mode
- Projector optics employ lead-free lenses
- Unpainted plastic housing reduces the environment impact
- The flame retardants used in the plastic housing do not
- contain chlorine or bromineLaser light technology eliminates the need for lamp





For more information on Epson's environmental programmes, visit http://global.epson.com/SR/environment.

Hassle-free meeting and collaborations from anywhere

Present persuasive and influential content in an engaging environment for ideas and knowledge exchange with the new Epson EB-L200 series. Conferences are made accessible and convenient using the split-screen capability integrated connectivity with Wi-Fi and Miracast support.

Information can now be shared in sharp and brilliant colours in meeting rooms of all sizes.




Built-in Connectivity

Project directly from your smart devices with built-in Wi-Fi and Miracast functions without installing extra drivers.



Split Screen Function

Power up efficiency in conferences by connecting up to four displays in one screen and accommodate better information sharing.

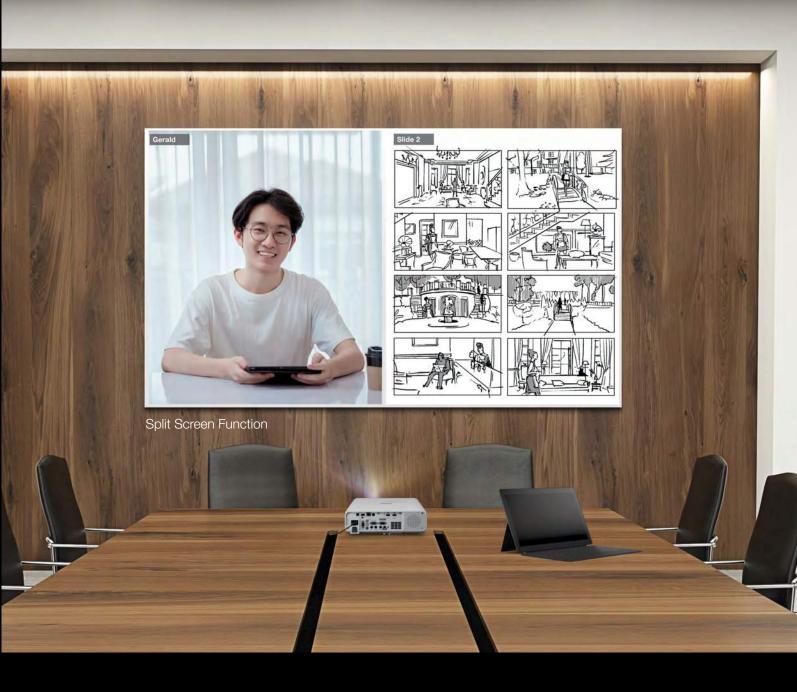



Quick Startup Time

Be up and running in no time, start your presentations and conferences immediately with the 5-sec quick startup time.



Flexible Placement

Space is no longer a constrain with the new Epson EB-L200 series. Compatible with the previous ELPMB23 ceiling mount and the newer optional mounts, the projector can also be placed on any surface, including a table just in front of your screen. Enjoy large and sharp images even in tight spaces in classrooms and meeting rooms.

Flexible Connectivity



Engaging Presentation





Knowledge Sharing



Immersive Communication



Wide Range of Connectivity

Project Documents, Photos, and More Wirelessly

Enjoy wireless projection via the Epson iProjection* app with your PC (Windows or Chromebook) or mobile devices. This powerful app allows you to share, manage, and annotate on displayed content from an easy-to-use, intuitive menu.

Using the iProjection App is easy:



* In iProjection mode, projector profile search, multi-screen display, distribution function, audio transfer, movie file transfer, and encryption data transfer capabilities are not supported.

- 15th

Intuitive User Interface

Home Screen

View and access your most frequently used functions immediately from the home screen. See all input sources at one glance and switch between them easily. For a faster and easier wireless connection, the projector's wireless network information and QR code are shown on the home screen too.



Compact and Portable


The sleek and lightweight Epson EB-L200 series make it easy and convenient to reallocate them in different classrooms and meeting rooms.



Approx. 4.1kg (Excl. cable cover)


Arc Correction

Quickly and easily correct any vertical or horizontal distortion of the projected image on large screens.

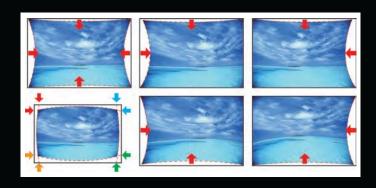

Plug-and-play with HDMI

Convenient and accessible, the Epson EB-L200 series come equipped with up to 2 HDMI ports compatible with HDCP 2.2 connection.



ULTRA LONG-LIFE.



When it comes to lasting performance and reliability, laser is lightyears ahead. With no lamp to replace, Epson laser projectors can operate for up to 20,000 hours with minimal maintenance. Combined with improved energy efficiency, this reduces the cost of ownership too, giving you dependable big-screen presentation without big budget demands.







PROJECTOR WISHES COME TRUE.

EPSON 3LCD PROJECTORS



WHITE 3000 LUMENS **(**) - (COLOUR 3000 LUMENS



TRUE COMFORT

> TRUE REALISM

PRISM

WIDER

RANGE



1-CHIP PROJECTORS







SOURCE









LIGHT

SOURCE

Find out more at www.epson.co.in/epson-3lcd-technology

- Leading Epson business and education projectors vs. leading 1-chip DLP® projectors, selected according to NPD data as of July 2015. Based on U.S. research conducted by Radius Research.
 These lumen statistic can be found at www.colorlightoutput.com.
 Color brightness/color light output in brightest mode, measured by a third-party lab in accordance with IDMS 15.4. Color brightness will vary depending on usage conditions. Top-selling Epson 3LCD projectors versus top-selling 1-chip DLP® projectors based on NPD sales data for May 2017 April 2018.
 Gamut volume in brightest mode, measured by a third-party lab in 3D in the CIE L*a*b* coordinate space. Top-selling Epson 3LCD projectors versus top-selling 1-chip DLP® projectors based on NPD sales data for May 2017 April 2018.



TRUE



SPECIFICATIONS

| MODEL NUMBER | | EB-L200F | EB-L200W | EB-L200SW | Supplied Acces |
|--|---|--|--|--|------------------|
| SKU Number | | V11H990056 | V11H991056 | V11H993056 | Power Cable: 1. |
| Projection Tech | | RGB liquid crystal shutter project | tion system | | HDMI Cable (1.8 |
| Specifications of | | | | | Remote Control |
| _CD | Size | 0.62" (C2Fine) | 0.59" (C2Fine) | 0.59" (C2Fine) | |
| Projection Long | Resolution | Full HD (1080p)* Optical Zoom (Manual) / Focus (| WXGA (1280 x 800) | WXGA (1024 x 768) | Optional Acces |
| Projection Lens | Type F-Number | 1.49 – 1.77 | [1.51 – 1.99 | | Air Filter:ELPAF |
| | Focal Length | 18.2 – 29.2mm | | | |
| | Zoom Ratio | 1.0 – 1.62 (Optical Zoom) | | | Wireless LAN ur |
| | Throw Ratio | 1.33 – 2.16 | 1.38 - 2.24 | | |
| Light Source | | | | | |
| Туре | | Laser Diode | | | |
| Life (Normal / Quiet / Extended) Screen Size (Projected Distance) | | 20,000 / 20,000 / 20,000 hrs Standard: 60" screen @ 172cm Standard:60" screen @ 179cm Standard: 87" screen @ 91cm | | | |
| | | Standard: 60" screen @ 172cm Zoom (Wide): 40" to 500" screen | | candard:ou screen @ 1/9cm Standard: 8/ screen @ 91cm com (Wide): 29" to 282" screen Zoom (Wide): 30" to 300" screen | |
| | | (114 – 1,461cm) | (85 – 851cm) | (83 – 854cm) | |
| Brightness ^{*1} | | | | | |
| White Light Output (Normal / Eco) | | 4,500lm / 3,150lm | 4,200lm / 2,940lm | | |
| Colour Light Output | | 4,500lm | 4200lm | | |
| Contrast Ratio | | Over 2,500,000 : 1 | | | |
| Internal Speake | er(s) | | | | ER 200E/ 200 |
| Sound Output | no otion | 16W Monoaural | | | EB-L200F/L200 |
| Geometric Correction Vertical / Horizontal Keystone | | ±30° / ±30° | | | |
| Quick Corner | | ±30°/±30° Yes (Manual) | | | -0 |
| Image | | | | | |
| Dynamic Contras | t | Yes | | | A second |
| Noise Reduction | | Yes | | | |
| Super-Resolution | | Yes | | | |
| Detail Enhancem | ent | Yes | | | |
| Connectivity | | | | | |
| Analog Input | D-Sub 15Pin | 2 (RGB) | | | |
| Distallant | Composite | RCA x 1 (Yellow) 2 (HDCP 2.2) | | | |
| Digital Input | gital Input HDMI 2 (HDCP 2.2) valog Output Terminal D-Sub 15Pin 1 (Black) (in common with Computer 2) | | | | |
| Audio Input | RCA | 2 (White, Red) | | | |
| ridalo inpat | Stereo Mini Jack | 2 (VIIIIC, 1100) | | | |
| Audio Output Stereo Mini Jack | | 1 | | | |
| Others | USB Type A | 1 (for Saving and Reading Data via USB, Firmware Update, Copy OSD Settings, Document Camera) | | | |
| | USB Type B | 1 (for Firmware Update, Copy OSD Settings) | | | |
| | Mic I/O | Stereo Mini x 1 | | | |
| Control I/O Network | RS-232C | D-Sub 9pin x 1 | | | |
| | Wired LAN | RJ45 x 1 (100Mbps) Built-in ¹² (USB Type A x 1 using Optional ELPAP11 wireless unit) | | | |
| Wireless Specif | Wireless | Built-In- (USB Type A x Tusing | Optional ELPAP IT wireless unit) | | |
| | nd Screen Mirroring) | | | | |
| Supported Speed | | Infrastructure: IEEE 802.11b (2.4 | 1GHz): 11Mbps ^{*3} , IEEE 802.11g (2.4GHz): | 54Mbps ^{:3} IEEE 802.11n (2.4GHz): 72.2Mbps ^{:3} | |
| | | IEEE 802.11a (5GHz): 54Mbps'3, IEEE 802.11n (5GHz): 150Mbps'3, IEEE 802.11ac (5GHz): 325Mbps'3 | | | |
| | | Access Point (Wi-Fi Direct): IEEE 802.11g (2.4GHz): 54Mbps'3, IEEE 802.11n (2.4GHz): 72.2Mbps'3, | | | |
| | | IEEE 802.11a (5GHz): 54Mbps ^{*3} , IEEE 802.11n (5GHz): 150Mbps ^{*3} , IEEE 802.11ac (5GHz): 325Mbps ^{*3} | | | |
| Supported Mode | | Infrastructure, Access Point (Wi-Fi Direct) | | | |
| Wireless LAN Sec | curity | Infrastructure: OPEN, WPA2 / WPA3-PSK, WPA2 / WPA3-EAP Supported EAP Type: PEAP, PEAP-TLS, EAP-TLS, EAP-Fast ; | | | |
| | | Access Point (Wi-Fi Direct): WPA2-PSK (AES) | | | |
| Operating Temp | perature'4 | | | | |
| Single Use Multi-projection Use | | 0 - 2,286 m (0 - 7,500 ft): 0 °C - 40 °C [32 °F - 104 °F]; 20% to 80% Humidity, No Condensation | | | |
| | | Over 2,286 m (7,500 ft): 0 - 35 °C [32 °F - 95 °F]; 20%-80% Humidity, No Condensation | | | |
| | | 0 - 2,286 m (0 - 7,500 ft): 0 °C - 35 °C [32 °F - 95 °F ; 20% to 80% Humidity, No Condensation | | | |
| | | Over 2,286 m (7,500 ft): 0 - 30 °C [32 °F - 86 °F]; 20%-80% Humidity, No Condensation | | | |
| Operating Altitude | | Over 1,500 m / 4,921 ft, with High Altitude Mode: 0 - 3,048 m (0 - 10,000 ft) | | | |
| Direct Power On / Off | | Yes | | | |
| Start-Up Period Quick Start-Up | | Less than 8 seconds, Warm-up Period: 30 seconds | | | |
| Quick Start-Up Cool Down Peri | od | Less than 5 seconds (Display) Instant Off | | | |
| Air Filter | Туре | Electrostatic Filter | | | |
| Maintenance Cycle | | | | | |
| Power Supply V | | 100 – 240 V AC ±10%, 50/60 H | Iz | | |
| | ption (220 - 240V) | | | | Dealer's Stamp |
| Fower Consum | I / Eco) | 254W / 193W | | | |
| Lamp On (Norma | | 2.0W / 0.5W | | | |
| Lamp On (Norma Standby (Networl | | | | | |
| Lamp On (Norma Standby (Networl Dimension Excl | uding Feet (D x W x H) | 299 x 325 x 90 mm | | | |
| Lamp On (Norma Standby (Networl | uding Feet (D x W x H) ble cover) | | 36dB / 26dB | | |

Supplied Accessories

Power Cable: 1.8m x 1 HDMI Cable (1.8m) Remote Control with 2xAA Battery

Optional Accessories

Air Filter:ELPAF60 Wireless LAN unit: ELPAP11

EB-L200F/L200W/L200SW



Pixel shifting technology achieves Full HD resolution on screen. Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118. With the built-in wireless mode, users can connect the device directly to the projector while with the additional ELPAP11, it is possible to connect the device not only directly to the projector but as well as via a network infrastructure. Maximum speed and range is achievable when used with same enhanced mode technology. Actual data rates, features and performance may vary depending on your computer system, the environment and other factors. When environmental temperature becomes high, the brightness becomes dark automatically. When environmental diffice environment (the amount of floating dust: 0.04 - 0.2 mg/m³). Based on the Epson's in-house test results.

Regional Offices:

EPSON INDIA PVT. LTD.

12th Floor, The Millenia, Tower A, No.1, Murphy Road, Ulsoor, Bangalore – 560 008. Tel: 080 4566 5000 Fax: 080 4566 5005

Clean **EPSON** e to clean call clear



Epson Helpline: For product info or service- 1800 425 0011 For service - 1800 123 001 600 or 1860 3000 1600 (9 am - 6 pm) (Mon - Sat) Email: projector@eid.epson.co.in

Ahmedabad 4037 0075, Chennai 3967 7500, Ernakulam 4012 315, Coimbatore 99620 00969 Hyderabad 4857 0032, Jaipur 0141 4923119, Kolkata 4603 4714/15/29/30, Mumbai 3079 8200 New Delhi 4107 3101, 4752 2414, 4226 3483, 4215 1033, Pune 3028 6000.

www.epson.co.in

Information correct at time of printing. Printed October 2022

Dealer's Stamp