



Outstanding Image Quality

Epson's 3LCD technology delivers exceptional color brightness, ensuring vibrant, clear visuals even in well-lit conference rooms, classrooms, or retail spaces. With up to 4,100 lumens*, these projectors provide superior clarity and impact, making them the perfect choice for professional presentations in bright environments.

*For EB-FH54.

Higher Colour Light Output

Epson's 3LCD technology delivers bright images with vivid colours, offering balanced white and colour light output, along with superior colour brightness for more vibrant images than 1-chip projectors.




1-chip Technology



Scene Adaptive Gamma

Automatically adjusts the gamma level based on the content being displayed, optimising contrast and image quality for each scene. It analyses the image frame by frame, dynamically adjusting the gamma to ensure a more vivid and natural-looking picture, even in both dark and bright scenes.

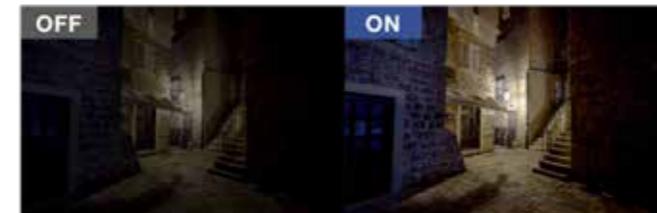

The Importance of Higher Resolution


High-resolution projectors capture every detail from PCs and other devices, ensuring seamless communication. As screen size increases, so does the need for higher resolution to maintain clear, sharp images. For example, SVGA resolution often falls short in providing the clarity required for smooth communication.

Epson's latest business projector lineup offers models in XGA, WXGA, and 1080p resolutions. The 1080p model, in particular, delivers crisp, sharp text and more detailed images, making it ideal for professional presentations.

Higher Resolution = Clearer Images and Sharper Text



Higher Resolution = Display More Detail and Information

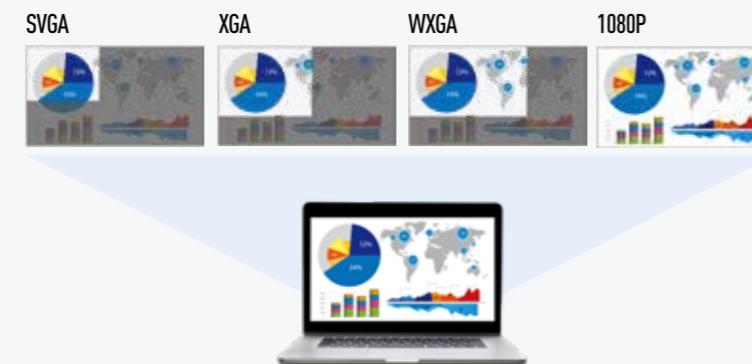

Bigger Screens for Better Impact

Epson business projectors deliver larger images, with screen sizes up to 300 inches*, offering better visibility and brighter images that remain clearly visible even from the back of the room. This ensures a stress-free viewing experience for everyone.

* Maximum screen size varies depending on model.



Split Screen Function for Corporate Except for EB-FH54

The split screen function allows two image sources to be projected on a single screen, eliminating the need for a second projector. This feature is ideal for video conferencing, enabling efficient multitasking during meetings.



Split Screen Function for Education Except for EB-FH54

In classrooms, the split screen function projects two images from separate devices, both wired and wirelessly. Connecting a projector to a document camera and a PC or tablet makes lessons more interactive and engaging.





Portability Meets Versatility

Easy To Carry

The Epson business projectors feature a compact design, making them easy to carry from one room to another, especially when compared to conventional flat panel displays (FPD).



Note: The projector carrying case is sold separately as an optional accessory.

Optical Zoom Except for EB-E12, W53 & W56S

Optical zoom provides the flexibility to adjust the projector's installation location while still maintaining the desired picture size and quality.




Horizontal Keystone Slider Except for EB-E12, W53 & W56S

With the easy-to-use sliding Horizontal Keystone Slider, screen corrections can be done quickly, easily, and accurately, even in a limited space.



Quick and Easy Positioning

Allows for easy adjustment and a wide range of projection positions using the foot lever.

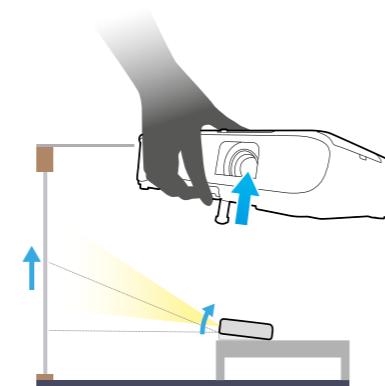

Auto Vertical Keystone Except for EB-E12 & W53

Saving setup time, Auto Vertical Keystone automatically detects and corrects image distortion when the foot lever is used to adjust the height of a projected image.



Auto Source Search

Automatically detects the input signal and projects the image without the need for a remote control or manual button operation.

Plug-in and Present

Screen Mirroring with Miracast® Only for EB-FH54

Miracast support makes it easy to connect smart devices or laptops to the projector wirelessly— no additional accessories or app installations required. This quick and seamless connection enables smarter presentations and eliminates the hassle of messy cables.

Dual Connection

Easily connect to two devices simultaneously using Miracast. This feature improves flexibility and saves time during meetings or lessons.


- Seamlessly switch between two connected devices without disconnecting each time
- Supports split screen with two Miracast sources for enhanced productivity



Enhanced Secure Connection

Keep your wireless connections secure and under control with added Miracast safety features.

- Prevents unintended or unauthorised Miracast connections
- “Access Control” lets the moderator approve connection requests
- Specific devices can be added to a blocklist to deny future connection attempts

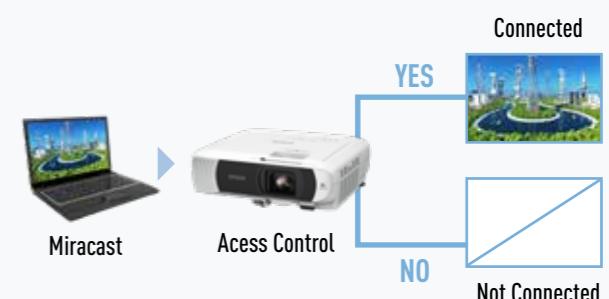

Up to Four Screens at once with iProjection

Except for EB-E12 & W53

Use the Epson iProjection* app to wirelessly share and control content from up to four connected devices simultaneously. The app also allows you to transfer still images and files from your smart device for smooth, wireless projection.



Seamless Streaming Made Easy with AirPlay 2

Only for EB-FH54

This projector features built-in Apple AirPlay 2, making it easy to stream videos, music, photos, and more directly from your iPhone, iPad, or Mac, with synchronized playback across other AirPlay-enabled devices.



* Epson iProjection eliminates the need for annoying cabling by transferring still images and supported files from smart devices to projectors, for smooth wireless projection.

Disclaimer: AirPlay 2 is a wireless media streaming protocol developed by Apple.



Smart Features For Smooth Operation

Lens Shutter Except for EB-E12, W53 & W56S

The lens shutter can be used to quickly stop and start projection without actually turning power off and on. This feature temporarily blocks an image projected onto a whiteboard, allowing the whiteboard to be used.




Auto Power On Supported interface varies per model

This feature can be used to automatically power up a projector when the projector is connected by cable to a device such as PC, saving setup time.



Easy Lamp Replacement

When it's time to replace the lamp, simply purchase and install it yourself. No additional service required. This saves time and keeps maintenance hassle free.

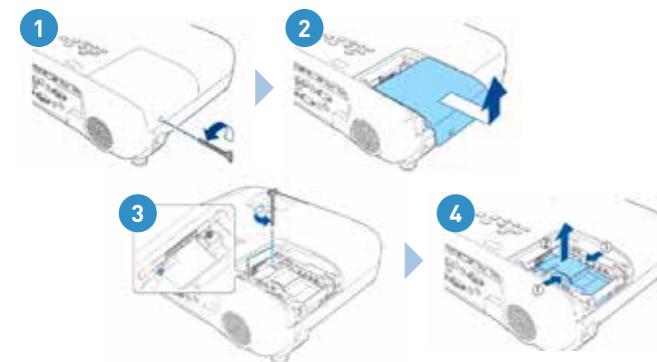


Home Screen

The home screen offers quick access to frequently used functions. Connected interfaces can be recognised at a glance and switched instantaneously. The information needed when setting up a wireless connection is projected on-screen, making connection fast and easy.



Direct Power Off

Simply unplug the power cable to turn off the projector after use and speed up clean-up after meetings and lessons.

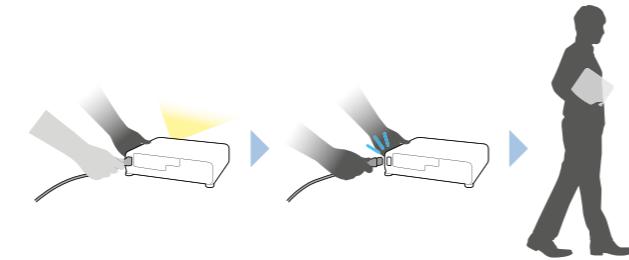

Built-in Speaker

A powerful speaker delivers clear sound even in large rooms, eliminating the need to set up additional speakers.



Reliable and Low Maintenance

Easy Maintenance and Longer Lamp Life

A long lamp life reduces maintenance and costs. The lamp lasts up to 12,000 hours in ECO mode, equivalent to 10 years of use. This reduces the frequency of lamp replacements, saving you time and money while lowering the total cost of ownership.

Note: EB-W56S can last up to 17,000 hours in ECO mode.



WPA2 / WPA3-Enterprise For EB-FH54

WPA2/WPA3-Enterprise provides a safe method of wireless connectivity so that projectors can connect to a business environment over a secure wireless network.



MODEL COMPATIBILITY OVERVIEW

	EB-E12	EB-W53	EB-W55	EB-FH54	EB-W56S
White/Colour Light Output	3,600lm	4,000lm	4,000lm	4,100lm	3,700lm
Colour Light Output	●	●	●	●	●
Resolution	XGA	WXGA	WXGA	1080p	WXGA
Scene Adaptive Gamma	●	●	●	●	●
Bigger and Brighter Images	●	●	●	●	●
Up to Four Screens at Once with iProjection			●	●	●
Split Screen Function	●	●	●		●
Split Screen Function for Wired/Non-Wired Devices			●		●
Optical Zoom			1 - 1.2	1 - 1.62	
Auto Vertical Keystone			●	●	●
Horizontal Keystone Slider			●	●	
Screen Mirroring with Miracast®				●	
AirPlay 2				●	
Wi-Fi 6				●	
USB-A 5V2A Power Supply			●	●	
Lamp Life	12,000 hrs/Eco	12,000 hrs/Eco	12,000 hrs/Eco	12,000 hrs/Eco	17,000 hrs/Eco
WPA2/WPA3-Enterprise				●	
Lens Shutter			●	●	
Home Screen	●	●	●	●	●
Auto Power On	●	●	●	●	●
Direct Power On	●	●	●	●	●
Built-in Speaker	2W	2W	2W	16W	16W

SPECIFICATIONS

MODEL NUMBER	EB-E12
SKU Code	V11HB55056
Projection Technology	RGB liquid crystal shutter projection system (3LCD)
Specifications of Main Parts	
LCD	Size 0.55" (C2 Fine) Driving Method Poly-silicon TFT active matrix Pixel Number 786,432 dots (1024 x 768) x 3 Native Resolution XGA Aspect Ratio 4:3 Pixel Arrangement Cross stripe
Projection Lens	Type No Optical Zoom / Focus (Manual) F-Number 1.44 Focal Length 16.7 mm Zoom Ratio 1.0 - 2.0 (Digital Zoom) Throw Ratio 1.44 - 2.88
Lightsource	Lamp Type 210 W UHE Life (Normal / Eco) 6,000 hours / 12,000 hours
Screen Size (Projected Distance)	
Zoom: Wide	30" - 350" [0.87 - 10.34 m]
Zoom: Tele	15" - 175" [0.87 - 10.34 m]
Standard Screen Size	60" [1.76 m]
Brightness¹	
White Light Output (Normal / Eco)	3,600 lm / 2,200 lm
Colour Light Output	3,600 lm
Light Output (Center) ²	3,700 lm
Contrast Ratio	15,000:1
Geometric Correction	
Vertical / Horizontal Keystone	±30° / ±30°
Connectivity	
Analog Input	D-Sub 15pin N/A
RCA	N/A
Digital Input	HDMI Type A 2 (HDCP 1.4)
Analog Output	D-Sub 15pin N/A
USB Input	USB Type B 1 (For Firmware Update, Copy OSD Settings)
Control I/O	RS-232C N/A
Audio Input	Stereo Mini N/A
Audio Output	Stereo Mini 2RCA (White x1, Red x1)
Internal Speaker	
Operating Temperature	Monaural 2W x 1
Operating Altitude	
Low Altitude (0 - 2,286m/7,500ft): 5 - 40 °C <41 - 104 °F>	
High Altitude (Over 2,286m/7,500ft): 5 - 35 °C <41 - 95°F>	
20% - 80% Humidity, No Condensation	
Over 1,500m/4,921ft with High Altitude Mode: 0 - 3,048m (0 - 10,000ft)	
Direct Power On / Off	
Start-Up Period	Yes
Cool Down Period	Less than 7 seconds (Epson Logo); Warm-up Period: 30 seconds
Air Filter	Type Electrostatic Filter Maintenance Cycle ³ 6,000 hours (Normal) / 12,000 hours (Eco)
Power Supply Voltage	
Power Consumption (220 - 240V)	
Lamp On	Normal 332 W Extended 231 W
Standby (Normal / Eco)	N/A / 0.3 W
Dimension Excluding Feet (W x D x H)	
Weight	302 x 234 x 77 mm Approx. 2.4kg
Fan Noise (Normal / Eco)	37dB / 28dB

Supplied Accessories
Power Cable: 1.8m, 3 wire
Remote Control: Yes, with Alkaline AA Battery
User Guide

Optional Accessories
Spare Lamp: ELPLP97
Air Filter: ELPAF32
Document Camera: ELPDC13, ELPDC21, ELPDC30

EB-E12



SPECIFICATIONS

MODEL NUMBER	EB-W53
SKU Code	V11HB57056
Projection Technology	
Specifications of Main Parts	
LCD	Size 0.59" (C2 Fine) Driving Method Poly-silicon TFT active matrix Pixel Number 1,024,000 dots (1280 x 800) x 3 Native Resolution WXGA Aspect Ratio 16:10 Pixel Arrangement Cross stripe
Projection Lens	Type No Optical Zoom / Focus (Manual) F-Number 1.44 Focal Length 16.7 mm Zoom Ratio 1.0 - 2.0 (Digital Zoom) Throw Ratio 1.27 - 2.54
Lightsource	Lamp Type 210 W UHE Life (Normal / Eco) 6,000 hours / 12,000 hours
Screen Size (Projected Distance)	
Zoom: Wide	33" - 375" [0.89 - 10.34 m]
Zoom: Tele	16" - 188" [0.89 - 10.34 m]
Standard Screen Size	60" [1.64 m]
Brightness¹	
White Light Output (Normal / Eco)	4,000 lm / 2,600 lm
Colour Light Output	4,000 lm
Light Output (Center) ²	4,100 lm
Contrast Ratio	16,000:1
Geometric Correction	
Vertical / Horizontal Keystone	±30° / ±30°
Auto Keystone Correction	NA
Connectivity	
Digital Input	HDMI 2 (HDCP 1.4)
USB Input	USB Type A N/A
	USB Type B 1 (For Firmware Update, Copy OSD Settings)
Network	Wireless LAN N/A
Internal Speaker	
Wireless Specification (Built-in Wireless LAN)	Monaural 2W x 1
Supported Speed	N/A
Supported Interface	N/A
Security Type	N/A
Operating Temperature	
Low Altitude (0 - 2,286m/7,500ft): 5 - 40 °C <41 - 104 °F>	
High Altitude (Over 2,286m/7,500ft): 5 - 35 °C <41 - 95°F>	
20% - 80% Humidity, No Condensation	
Over 1,500m/4,921ft with High Altitude Mode: 0 - 3,048m (0 - 10,000ft)	
Operating Altitude	
Direct Power On / Off	Yes
Start-Up Period	Less than 7 seconds (Epson Logo); Warm-up Period: 30 seconds
Cool Down Period	Instant Off
Air Filter	Type Electrostatic Filter Maintenance Cycle ³ 6,000 hours (Normal) / 12,000 hours (Eco)
Power Supply Voltage	
Power Consumption (220 - 240V)	
Lamp On	Normal 332 W Extended 231 W
Standby (Normal / Eco)	N/A / 0.3 W
Dimension Excluding Feet (W x D x H)	
Weight	302 x 234 x 77 mm Approx. 2.5kg
Fan Noise (Normal / Eco)	37dB / 28dB

Supplied Accessories
Power Cable: 1.8m, 3 wire
HDMI Cable: 1.8m
Remote Control: Yes, with Alkaline AA Battery
User Guide

Optional Accessories
Spare Lamp: ELPLP97
Air Filter: ELPAF32
USB Document Camera (EB-W55): ELPDC07
Document Camera: ELPDC13, ELPDC21, ELPDC30

EB-W53



¹ Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.

² This light output value is measured at the centre of the screen as a reference value. There is no official standard for light output (Centre) measurements and this measurement is made based on the method set by Epson.

³ When used in the general office environment (the amount of floating dust: 0.04 - 0.2 mg/m³). Based on the Epson's in-house test results.

¹ Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.

² This light output value is measured at the centre of the screen as a reference value. There is no official standard for light output (Centre) measurements and this measurement is made based on the method set by Epson.

³ When used in the general office environment (the amount of floating dust: 0.04 - 0.2 mg/m³). Based on the Epson's in-house test results.

SPECIFICATIONS

MODEL NUMBER	EB-W55
SKU Code	V11HB58056
Projection Technology	RGB liquid crystal shutter projection system (3LCD)
Specifications of Main Parts	
LCD	Size 0.59" (C2 Fine) Driving Method Poly-silicon TFT active matrix Pixel Number 1,024,000 dots (1280 x 800) x 3 Native Resolution WXGA Aspect Ratio 16:10 Pixel Arrangement Cross stripe
Projection Lens	Type Optical Zoom (Manual) / Focus (Manual) F-Number 1.44 Focal Length 16.9 - 20.28 mm Zoom Ratio 1.0 - 1.2 Throw Ratio 1.30 - 1.56
Lightsource	Lamp Type 210 W UHE Life (Normal / Eco) 6,000 hours / 12,000 hours
Screen Size (Projected Distance)	
Zoom: Wide	33" - 320" [0.91 - 9.07 m]
Zoom: Tele	33" - 320" [1.10 - 10.89 m]
Standard Screen Size	60" [1.68 - 2.02 m]
Brightness¹	
White Light Output (Normal / Eco)	4,000 lm / 2,600 lm
Colour Light Output	4,000 lm
Light Output (Center) ²	4,100 lm
Contrast Ratio	16,000:1
Geometric Correction	
Vertical / Horizontal Keystone	±30° / ±30°
Auto Keystone Correction	Yes (V only)
Connectivity	
Digital Input	HDMI 2 (HDCP 1.4)
USB Input	USB Type A 1 (For Firmware Update, Copy OSD Settings) USB Type B 1 (For Firmware Update, Copy OSD Settings)
Network	Wireless LAN Built-in
Internal Speaker	
Monaural 2W x 1	
Wireless Specification (Built-in Wireless LAN)	
Supported Speed	IEEE 802.11a/b/g/n
Supported Interface	Infrastructure, Simple AP (Wi-Fi Direct)
Security Type	Infrastructure: Open, WPA2 / WPA3-PSK Simple AP (Wi-Fi Direct): OPEN, WPA2-PSK (AES)
Operating Temperature	
Low Altitude (0 - 2,286m/7,500ft):	5 - 40 °C <41 - 104 °F>
High Altitude (Over 2,286m/7,500ft):	5 - 35 °C <41 - 95°F>
20% - 80% Humidity, No Condensation	
Over 1,500m/4,921ft with High Altitude Mode:	0 - 3,048m (0 -10,000ft)
Operating Altitude	
Direct Power On / Off	Yes
Start-Up Period	Less than 7 seconds (Epson Logo); Warm-up Period: 30 seconds
Cool Down Period	Instant Off
Air Filter	Type Electrostatic Filter Maintenance Cycle ³ 6,000 hours (Normal) / 12,000 hours (Eco)
Power Supply Voltage	
Power Consumption (220 - 240V)	
Lamp On	Normal 332 W Extended 231 W
Standby (Normal / Eco)	2.0 / 0.3 W
Dimension Excluding Feet (W x D x H)	302 x 234 x 87 mm
Weight	Approx. 2.6kg
Fan Noise (Normal / Eco)	
	37dB / 28dB

¹ Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.

² This light output value is measured at the centre of the screen as a reference value. There is no official standard for light output (Centre) measurements and this measurement is made based on the method set by Epson.

³ When used in the general office environment (the amount of floating dust: 0.04 - 0.2 mg/m³). Based on the Epson's in-house test results.

Supplied Accessories
Power Cable: 1.8m, 3 wire
HDMI Cable: 1.8m
Remote Control: Yes, with Alkaline AA Battery
User Guide

Optional Accessories
Spare Lamp: ELPLP97
Air Filter: ELPAF32
USB Document Camera (EB-W55): ELPDC07
Document Camera: ELPDC13, ELPDC21, ELPDC30



SPECIFICATIONS

MODEL NUMBER	EB-FH54
SKU Code	V11HB59056
Projection Technology	RGB liquid crystal shutter projection system (3LCD)
Specifications of Main Parts	
LCD	Size 0.62" (C2 Fine) Driving Method Poly-silicon TFT active matrix Pixel Number 2,073,600 dots (1920 x 1080) x 3 Native Resolution Full HD Aspect Ratio 16:9 Pixel Arrangement Cross stripe
Projection Lens	Type Optical Zoom (Manual) / Focus (Manual) F-Number 1.51 - 1.77 Focal Length 18.2 - 29.1 mm Zoom Ratio 1.0 - 1.62 Throw Ratio 1.30 - 2.09
Lightsource	Lamp Type 230 W UHE Life (Normal / Eco) 5,500 hours / 12,000 hours
Screen Size (Projected Distance)	
Zoom: Wide	31" - 304" [0.88 - 8.88 m]
Zoom: Tele	31" - 304" [1.43 - 14.29 m]
Standard Screen Size	60" [1.73 - 2.80 m]
Brightness¹	
White Light Output (Normal / Eco)	4,100 lm / 2,300 lm
Colour Light Output	4,100 lm
Light Output (Center) ²	4,400 lm
Contrast Ratio	16,000:1
Geometric Correction	
Vertical / Horizontal Keystone	±30° / ±30°
Auto Keystone Correction	Yes (V only)
Internal Speaker	
	Monaural 16W x 1
Connectivity	
Digital Input	HDMI 2 (HDCP 1.4)
Audio Output	Stereo Mini 1
USB Input	USB Type A 1 (For Wireless LAN, Firmware Update, Copy OSD Settings)
USB Type B	1 (For Firmware Update, Copy OSD Settings)
Network	Wireless LAN Built-in
Miracast	
Certification	Wi-Fi CERTIFIED Miracast R2
Supported Codec	H.264 (AVC)
AirPlay 2	
Supported Codec	H.264(AVC), H.265(HEVC), AV1, VP9, MPEG-2, MPEG-4
Wireless Specification (Built-in Wireless LAN)	
Supported Speed	IEEE 802.11a/b/g/n/ac/ax
Supported Interface	Infrastructure, Simple AP (Wi-Fi Direct)
Security Type	Infrastructure: Open, WPA2 / WPA3-PSK, WPA2/WPA3-EAP Supported EAP Type: PEAP, EAP-TLS Simple AP (Wi-Fi Direct): WPA2-PSK (AES)
Operating Temperature	
Low Altitude (0 - 2,286m/7,500ft):	5 - 40 °C <41 - 104 °F>
High Altitude (Over 2,286m/7,500ft):	5 - 35 °C <41 - 95°F>
20% - 80% Humidity, No Condensation	
Over 1,500m/4,921ft with High Altitude Mode:	0 - 3,048m (0 -10,000ft)
Operating Altitude	
Direct Power On / Off	Yes
Start-Up Period	Less than 8 seconds (Epson Logo); Warm-up Period: 30 seconds
Cool Down Period	Instant Off
Air Filter	Type Electrostatic Filter Maintenance Cycle ³ 10,000 hours (Normal) / 20,000 hours (Eco)
Power Supply Voltage	
Power Consumption (220 - 240V)	
Lamp On	Normal 332 W Extended 231 W
Standby (Normal / Eco)	N/A / 0.3 W
Dimension Excluding Feet (W x D x H)	309 x 282 x 90 mm
Weight	Approx. 3.1kg
Fan Noise (Normal / Eco)	
	37dB / 28dB

¹ Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.

² This light output value is measured at the centre of the screen as a reference value. There is no official standard for light output (Centre) measurements and this measurement is made based on the method set by Epson.

³ When used in the general office environment (the amount of floating dust: 0.04 - 0.2 mg/m³). Based on the Epson's in-house test results.

Supplied Accessories
Power Cable: 3m, 3 wire
HDMI Cable: 1.8m
Remote Control: Yes, with Alkaline AA Battery
User Guide

Optional Accessories
Spare Lamp: ELPLP97
Air Filter: ELPFA54
USB Document Camera: ELPDC07
Document Camera: ELPDC13, ELPDC21, ELPDC30



SPECIFICATIONS

MODEL NUMBER	EB-W56S	
SKU Code	V11HB62056	
Projection Technology	RGB liquid crystal shutter projection system (3LCD)	
Specifications of Main Parts		
LCD	Size Driving Method Pixel Number Native Resolution Aspect Ratio Pixel Arrangement	0.59" (C2 Fine) Poly-silicon TFT active matrix 1,024,000 dots (1280 x 800) x 3 WXGA 16:10 Cross stripe
Projection Lens	Type F-Number Focal Length Zoom Ratio Throw Ratio	No Optical Zoom / Focus (Manual) 1.8 7.8 mm 1.0 – 1.35 (Digital Zoom) 0.60 – 0.81
Lightsource	Lamp Type Life (Normal / Medium / Eco)	230 W UHE 6,500 hours / 10,000 hours / 17,000 hours
Screen Size (Projected Distance)		
Zoom: Wide	50" – 300" [0.64 – 3.94 m]	
Zoom: Tele	37" – 222" [0.64 – 3.94 m]	
Standard Screen Size	75" [0.97 m]	
Brightness¹		
White Light Output (Normal / Eco)	3,700 lm / 2,000 lm	
Colour Light Output	3,700 lm	
Light Output (Center) ²	3,900 lm	
Contrast Ratio		
Vertical / Horizontal Keystone	16,000:1	
Auto Keystone Correction		
Internal Speaker		
Monaural 16W x 1		
Connectivity		
Analog Input	D-Sub 15pin RCA	2 (RGB, RGB Video) 1
Digital Input	HDMI	2 (HDCP 1.4)
Analog Output	D-Sub 15pin	1 (RGB, RGB Video)
Audio Input	2RCA (White x1, Red x1)	1
Audio Output	Stereo Mini	2
Mic Input	Stereo Mini	1
Control	RS-232C	1
USB Input	USB Type A	1 (For Wireless LAN, Firmware Update, Copy OSD Settings)
	USB Type B	1 (For Firmware Update, Copy OSD Settings)
Network	Wired Lan Wireless LAN	RJ45 x1 Optional
Wireless Specification (Optional Wireless LAN)		
Supported Speed	IEEE 802.11a/b/g/n	
Supported Mode	Infrastructure, Simple AP (Wi-Fi Direct)	
Security Type	Infrastructure: Open, WPA2 / WPA3-PSK Simple AP (Wi-Fi Direct): OPEN, WPA2-PSK (AES)	
Operating Temperature		
Low Altitude (0 - 2,286m/7,500ft):	5 - 40 °C <41 - 104 °F>	
High Altitude (Over 2,286m/7,500ft):	5 - 35 °C <41 - 95°F>	
20% - 80% Humidity, No Condensation	Over 1,500m/4,921ft with High Altitude Mode: 0 - 3,048m (0 -10,000ft)	
Operating Altitude		
Direct Power On / Off	Yes	
Start-Up Period	Less than 7 seconds (Epson Logo); Warm-up Period: 30 seconds	
Cool Down Period	Instant Off	
Air Filter	Type Maintenance Cycle ³	Electrostatic Filter 10,000 hours (Normal) / 20,000 hours (Eco)
Power Supply Voltage		
Power Consumption (220 - 240V)		
Lamp On	Normal Extended	332 W 231 W
Standby (Normal / Eco)		2.0/ 0.3 W
Dimension Excluding Feet (Wx D x H)		
Weight	309 x 282 x 90 mm	
Fan Noise (Normal / Eco)	Approx. 3.1kg 38dB / 28dB	

¹ Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15.4; white light output measured in accordance with ISO 21118.

² This light output value is measured at the centre of the screen as a reference value. There is no official standard for light output (Centre) measurements and this measurement is made based on the method set by Epson.

³ When used in the general office environment (the amount of floating dust: 0.04 - 0.2 mg/m³). Based on the Epson's in-house test results.

Supplied Accessories

Power Cable: 1.8m, 3 wire

HDMI Cable: 1.8m

Remote Control: Yes, with Alkaline

AA Battery

User Guide

Optional Accessories

Spare Lamp: ELPLP97

Air Filter: ELPAF54

Wireless LAN Unit: ELPAP11

USB Document Camera: ELPDC07

Document Camera:

ELPDC13, ELPDC21, ELPDC30

EB-W56S



© 2026 Epson India Pvt. Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited. EPSON is registered trademark of Seiko Epson Corporation. All other products names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. Print samples shown are simulations only. Specifications and product availability are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct as of January 2026

EPSON INDIA PVT. LTD.

11th Floor, Godrej Centre, Hebbal, Survey No.26, Bellary Road, Sahakar Nagar, Byatarayanapura, Bangalore 560 092, Karnataka.

Tel: 080 6939 5000. Fax: 080 6939 5005



Epson Helpline: For product info or service - 1800 425 0011

For service: 1800 123 001 600 or 1860 3000 1600 (9 am - 6 pm) (Mon - Sat)

Email: emp@eid.epson.co.in

www.epson.co.in