A CONVENIENT, FAST AND EASY TO USE PROFESSIONAL MINILAB PRINTER

Convenient, fast and easy professional photo printing.

Give your prints the edge with Epson's SureLab™ SL-D530. Designed with Micro Piezo™ printhead technology and UltraChrome™ D6r-S inks, this ultra-versatile photo printer delivers premium colour accuracy and sharpness for accurate professional prints of every kind. With a lightweight and compact body, the SureLab™ SL-D530 allows double-sided printing, making it ideal for photo kiosks, self-photo studios and event printing.

ULTRACHROME D6r-S INK

SPECIFICATIONS

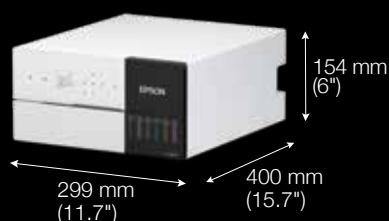|	
MODEL NUMBER	SL-D530
SKU CODE	C11CK56403
PRINTING	
Technology 1	Micro Piezo™ Inkjet Technology
Technology 2	Variable-Sized Droplet Technology
Printhead	Micro Piezo™ Printhead
Nozzle Configuration	1,080 nozzles (180 nozzles x 6 channels x 1 head)
Maximum Resolution	High Quality: 1,440 x 720 dpi
	Standard: 720 x 720 dpi
	Draft: 720 x 360 dpi
Maximum Ink Droplet Volume	2.5 pl
Print Speed	19.4 sec (Default)[1]
Margin (Cut Sheet)	Full-scale printing is possible without borders on all sides.
	Bordered printing Top, Bottom, Right, Left: Min. 3 mm
INK SYSTEM	
Ink Type	Epson UltraChrome™ D6r-S Dye Ink
Colours	Cyan, Magenta, Yellow, Light Cyan, Light Magenta, Black
Ink Capacity	70 mL
Ink Case	Ink Bottle
MEDIA HANDLING	
Paper Path	Auto Sheet Feeder
Paper Feed Method	Friction Feed
Paper Size ASF	Width: 89 mm – 102 mm; Length: 127 mm – 152 mm
Paper Thickness ASF	0.20 mm – 0.265 mm
Maximum Printable Length	152 mm
Borderless Size	Width: 89, 100, 102 mm
ASF Capacity: Max. Sheets	Auto Sheet Feeder: 88.9 x 127 mm (3.5 x 5"), 101.6 x 152.4 mm (4 x 6") (100 sheets)
DISPLAY	
Colour/Size	Colour / 3.6 cm (1.4")
CONNECTIVITY	
Interfaces	Hi-Speed USB, 100BASE-TX/10BASE-T, IEEE802.11b/g/n
Printer Language	ESC/P-R
Memory	0.5 GB
ENVIRONMENT CHARACTERISTICS	
Temperature (ºC)	Operating: 10 ºC – 35 ºC ; Storage: -20 ºC – 40 ºC
Humidity	Operating: 20 – 80% (No Condensation);
	Storage: 5 – 85% (No Condensation)
DIMENSIONS & WEIGHT	
With Printing (W x D x H)	299 x 400 x 154 mm
Stowed (W x D x H)	299 x 350 x 154 mm
Weight (Excl. Ink Cartridge)	7.0 kg
ELECTRICAL SPECIFICATION	
Voltage	AC 100 to 120 V, 220 to 240 V, 50/60 Hz
Power	Operating: Approx. 18 W / Ready : Approx. 3.8 W /
	Sleep: Approx. 1.4 W / Standby: Approx. 0.2 W
NOISE LEVEL	
Sound Pressure Level	46 dB(A) or less
UTILITY SOFTWARE	
Bundled in CD	Windows®: Printer Driver, Installer Package, Software Updater, EpsonNet Print, EpsonNet setup, EpsonNet Config SE, Manual Package, System Software, Mac OS X: Installer Package
Window Supported OS	Windows® 11, Windows® 10, Windows® 8.1 for each 32bit/64bit
Mac Supported OS	Macintosh Mac OS X (10.9.5 or later), Mac OS 11.X

[1] SureLab Photo Paper Gloss (250), 101.6 x 152.4 mm (4 x 6").

DIMENSIONS & WEIGHT

SL-D530
Weight: Approx. 7 kg

154 mm (6")
299 mm (11.7")
400 mm (15.7")

WHAT'S IN THE BOX

Maintenance Box
Setup Guide
Paper Manual CD
AC Cable
USB Cable

INK (70 mL)

Black	C13T54H100
Cyan	C13T54H200
Magenta	C13T54H300
Yellow	C13T54H400
Light Cyan	C13T54H500
Light Magenta	C13T54H600

101.6 x 152.4 mm (4 x 6") (250gsm)

SureLab Photo Paper Gloss	C13S400209
SureLab Photo Paper Luster	C13S400210

88.9 x 127 mm (3.5 x 5") (250gsm)

SureLab Photo Paper Gloss	C13S400211
SureLab Photo Paper Luster	C13S400212

Other Consumables

Maintenance Box	C12C934591
Roller Assembly Kit	C13S210138

Dealer's Stamp

Information correct as of April 2025.

eClean
e-Waste to e-Clean
call . clear . clean

EPSON SERVICE