LARGE FORMAT PRINTERS
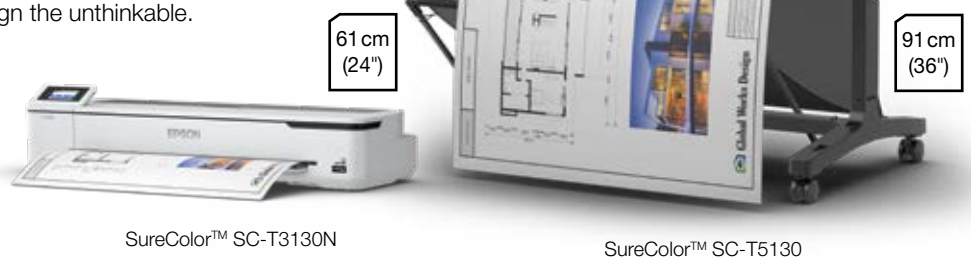## SURECOLOR™ SC-T3130N/T5130

EPSON

SPEED AND QUALITY THAT POWER TRUE DESIGN
Entry-level T-series CAD Printers

Defined by convenience, Epson's entry-level T-series CAD printers feature superior print speeds, all-pigment ink, wireless printing and more to help you focus on what truly matters and to design the unthinkable.

61 cm (24")

91 cm (36")

SureColor™ SC-T3130N

SureColor™ SC-T5130

31 Sec / A1 Print^	Anti-dust Printer Design	Wireless Printing	1-year On-site Warranty	Auto Cut-sheet and Roll Loading

^Under standard test conditions.

MODEL NUMBER		SC-T3130N	SC-T5130
Printer Width		61 cm (24")	91 cm (36")
Printing Technology	Printhead	PrecisionCore™ TFP® Printhead	
	Nozzle Configuration	3200 nozzles (800 nozzles x 4 channels x 1 head)	
Print Quality	Maximum Resolution	2400 x 1200 dpi	
	Minimum Ink Droplet Volume	4.0 pl	
Print Speed	CAD (A1)	34 sec	31 sec
Margin (Roll paper)		Roll / sheet top, bottom, right, left : Min. 3 mm[1]	
Ink Type		All-pigment ink	
Ink Brand		Epson UltraChrome™ XD2 Ink	
Colours		Cyan, Magenta, Yellow, Black	
Ink Capacity		Black: 80 mL, 50 mL; Cyan, Magenta, Yellow: 50 mL, 26 mL	
Ink Case		Ink cartridge	
Paper Handling	Paper Path	Friction feed	
	Maximum Roll Diameter / Weight	2-inch core, Max. 110 mm / 3 kg	2-inch core, Max. 110 mm / 5 kg
	Paper Width (Roll)	Roll: 329 mm - 610 mm, Cut-sheet (ASF): A4 - A3 Cut-sheet (50 sheets): 210 mm - 610 mm Roll, Maximum width of loadable roll media width is 620 mm, but maximum width of printing area is 610 mm.	Roll: 329 mm to 914 mm, Cut-sheet (ASF): A4 to A3, Cut-sheet (50 sheets): 210 mm to 910 mm
	Paper Thickness	Roll: 0.05 mm to 0.21 mm, ASF / Cut-sheet: 0.12 mm to 0.27 mm	Roll: 0.05 mm to 0.21 mm, ASF / Cut-sheet: 0.12 mm to 0.27 mm
	Roll Paper Remaining	The remaining amount is managed on control panel.	
Control Panel		10.9 cm (4.3") touch screen	
Interface		Super-speed USB*, 100 BASE-TX /1000 BASE-T/IEEE802.11b/g/n, Wi-Fi Direct	
Printer Language		ESC/P raster HP-GL/2, HP RTL	
Memory		1 GB	
Environmental Characteristics	Temperature	Operating: 10°C to 35°C Storage: -20°C to 40°C	
	Humidity	Operating: 20 to 80% (no condensation) Storage: 5 to 85% (no condensation)	
Dimensions / Weights	Dimensions (W x D x H)	Stowed: 970 x 696 x 913 mm (w/ stand), 970 x 505 x 230 mm (w/o stand) Printing: 970 x 982 x 913 mm (w/ stand), 970 x 982 x 230 mm (w/o stand)	Stowed: 1,268 x 616 x 913 mm (w/ stand), 1,268 x 505 x 230 mm (w/o stand) Printing: 1,268 x 811 x 913 mm (w/ stand), 1,268 x 811 x 230 mm (w/o stand)
Electrical Characteristics	Weight	(61 cm (24") w/o stand): 27 kg[2]	(91 cm (36") w/ stand) : 46 kg[2]
	Voltage	AC 100-240 V; Frequency: 50/60 Hz	
	Rated Current	1.4 A	
	Power Consumption	Operating: Approx. 28 W Ready: Approx. 8 W Sleep: Approx. 1.6 W (Interface is 1000BASE-T) Power Off (Standby): Approx. 0.2 W	
Acoustic Noise Level	Sound Pressure Level (dB(A))	Operating: Approx. 49 dB(A) Sleep: Approx. 32 dB(A)	
	Sound Power Level (B(A))	Operating: Approx. 7.5 dB(A)	
Utility Software	Bundled in CD	Windows Install Navi Printer driver EpsonNet Setup EpsonNet Print EpsonNet Config Epson Software Updater LFP Print Plug-in for Office MacSetup Navi	
	Web Delivery	Windows Install Navi Firmware Updater HDI Driver CopyFactory EpsonNet Setup Manager Mac Install Navi Printer Driver EpsonNet Config Epson Software Updater Uninstaller Epson Manuals Firmware Updater Linux Printer Driver	
Options		(61 cm (24")), Stand (61 cm (24")), Roll Feed Spindle (61 cm (24"))	(91 cm (36")), Stand (91 cm (36")), Roll Feed Spindle (91 cm (36"))
Consumables		Auto Cutter Spare Blade, Maintenance Box	
Safety		India (BIS)	
Environmental		WEEE, RoHS (EU, China, Korea, India), REACH, GreenPurchasing, GPN, Energy Star, Taiwan Green Mark, Eco Mark, Nordicswan, Erp Lot6	
System	System Requirements	Windows 10 / 8.1 / 8 / 7 / Vista / XP - CPU: Core 2 Duo, 3.05 GHz, Memory: More than 1 GB, HDD: Free space more than 32 GB Macintosh Mac OS X (10.6.8 or later) - CPU: Core 2 Duo 3.05 GHz, Memory: Memory more than 4 GB, HDD: Free space more than 32 GB	
	Bundled Items	Printer, Printer Stand[3], Initial Ink Cartridge, AC Power Cable, Setup Guide, Software CD-ROM, Maintenance Box	

*Compatible with the USB 3.0 Specification. [1]Differs based on applications/media. [2]Approx. without ink charges. [3]Printer stand only bundled with SC-T5130.

Information correct as of April 2025.

EPSON INDIA PVT. LTD.

11th Floor, Godrej Centre, Hebbal, Survey No. 26,
Bellary Road, Sahakar Nagar, Byatarayanapura,
Bangalore 560 092, Karnataka.
Tel: 080-6939 5000 Fax: 080-6939 5005

Regional Offices:
Ahmedabad 4037 0075, Chennai 4905 5177, Coimbatore 98942 19200, Ernakulam 4012 315,
Hyderabad 4857 0032, Jaipur 4923 119, Kolkata 4603 4714/15/29/30, Mumbai 3079 8200,
New Delhi 4107 3101, 4752 2414, Pune 2998 0641

Dealer's Stamp

eClean
e-Waste to e-Clean
call . clear . clean

EPSON SERVICE

Epson Helpline: For product info or service - 1800 425 0011
For service: 1800 123 001 600 or 1860 3000 1600 (9 am - 6 pm) (Mon - Sat)
Email: lfp@epson-india.in

www.epson.co.in