DYE SUBLIMATION TEXTILE PRINTER
SURECOLOR™ SC-F11030/F11030H

EPSON

ELEVATE EVERY DESIGN WITH STUNNING PRINT QUALITY

Elevate Your Printing Experience with State-of-the-Art Textile Printing Technology.

The Epson SureColor™ SC-F11030 and SC-F11030H dye sublimation textile printers seamlessly merge high efficiency and cutting-edge technology for print service providers.

Achieve efficiency with PrecisionCore™ Micro TFP® printheads, an integrated dryer, and the newly added jumbo roll option. Monitor print production status with Epson Cloud Solution PORT and ensure minimum downtime with self-repair function.

- Print 1200dpi
- 11.9cm Printheads
- x2 Dual Ink Supply System
- 1mm Up To 1mm Media Thickness
- Auto Tension Paper Feed
- Low Maintenance

GO GENUINE Original Supplies, Quality Prints
EPSON ULTRACHROME DS INK
OEKO TEX® ECO PASSPORT
PRECISIONCORE PRINTHEAD

High Productivity
Achieve high printing speed and optimal performance with 11.9cm PrecisionCore™ MicroTFP® printhead and an advanced dryer unit.

Precise Print Innovation
Industry-leading precision dot technology for high-quality prints and unmatched accuracy by the advanced Auto Tension Paper Feed function.

Enhanced Efficiency
Boost efficiency and minimise downtime with self-repair function and a bulk ink supply system that offer dual 10L ink packs for each colour.

Disclaimer: The OEKO-TEX® Standard 100 is only for selected inks only.

SPECIFICATIONS

MODEL NUMBER	SC-F11030	SC-F11030H
SKU Number	C11CK84402	C11CK85402
Printing Technology		
Technology 1	PrecisionCore™ Inkjet® Technology	
Technology 2	Variable-Sized Droplet Technology	
Printhead	PrecisionCore™ MicroTFP® Printhead	
Nozzle Configuration	The number of nozzles: 12,800 nozzles (1,600 nozzles x 2 lines x 4 heads)	The number of nozzles: 19,200 nozzles (1,600 nozzles x 2 lines x 6 heads)
Maximum Resolution	1,200 x 1,200 dpi (With 300 x 300 dpi 16 Half Tone layers)	
Minimum Ink Droplet Volume	3.8pl	
Printing Specifictaions		
Maximum Print Speed		
300 x 600 dpi, 1.1 Pass	255.1 m^2/h	246 m^2/h
600 x 600 dpi, 2.1 Pass	150.3 m^2/h	144 m^2/h
600 x 1,200 dpi, 5 Pass	65.3 m^2/h	63.0 m^2/h
600 x 1,200 dpi, 5 Pass HD	52.8 m^2/h	51.0 m^2/h
1,200 x 1,200 dpi, 9 Pass HD	29.3 m^2/h	28.0 m^2/h
Margin (Roll Paper)	7 mm (Right/Left) (14 mm when using Media Holding Plates), 5 mm (Top/Bottom)	
Ink System		
Ink Types	Dye Sublimation Transfer Ink	
Ink Brand Name	Urochrome Ink / Lanyu Ink	Urochrome Ink / Lanyu Ink
Colours	Cyan, Magenta, Yellow, High Density Black N/A	Light Cyan, Light Magenta, Fluorescent Yellow, Fluorescent Pink, Orange, Violet
Ink Capacity	10L	
Ink Case	Ink Packs	
Media Handling		
Paper Path	Roll (Single Roll)	
Paper Feed Method	Friction Feed	
Maximum Diameter / Weight	Standard Roll Unit: 250 mm / 60 kg, Jumbo Roll Unit: 500 mm / 300 kg, Standard Reel Unit: 250 mm / 60 kg	
Paper Width (Roll)	300 mm – 1,950 mm	
Paper Thickness	Up to 1 mm	
Printable Area	1,944 mm	
Fixing		
Heat Press Condition	Heater Temperature: 200ºC, 40s	
Control Panel	22.8cm Colour LCD Touch Panel	
Connectivity		
Interfaces	USB 3.0, 1000BASE-T	
Printer Language	ESC/P raster	
Memory	155 GB	
Electrical Specifications		
Voltage	AC 220 – 240V (withstand voltage AC 400V)	
Rated Current	16A x 2, 10A (Jumbo Roll Unit)	
Power Consumption	Operating: Approx. 3.9W Ready: Approx. 3.1W Sleep: Approx. 221W Power Off (Standby): Approx. 9.6W	Operating: Approx. 4.4W Ready: Approx. 3.1W Sleep: Approx. 221W Power Off (Standby): Approx. 9.6W
Environmetal Conditions		
Temperature	Operating: 10°C to 35°C / Storage: -20°C to 40°C	
Humidity	Operating: 20% to 80% (no condensation), Storage: 5% to 85% (no condensation)	
Sound Pressure	Approx. 59db(A)	
Sound Power	Approx. XXB(A)	
Supported Operating System		
PC	Windows 10/8.1/8/7 (32/64 bit), CPU: Core 2 Duo 3.05 GHz Memory: 8GB or more, HDD (Free space during installation): 50GB or more	
Mac	Mac OS X (10.7 or later), CPU: MultiCore 3.0 GHz, Memory: 4GB or more, HDD (Free space during installation): 2GB or more	
Utility Software		
Bundled in CD	Epson Software Updater, Epson Net Print, Epson Net Setup, Epson Net Config SE	
Web Delivery	Epson Edge Print Pro, Epson Edge Colour, Firmware Updater, Epson Edge Dashboard	
Certifications		
Safety	Canada: CSA, USA: UL, Mexico: NOM, EU, EFTA countries, Turkey / UK: Low Voltage Directive (CE/UKCA) Morocco: Safety & EMC Regulation (CP), Ukraine: Safety & EMC Regulation (Ukraine conformity mark), India: HSE Declaration, Hong Kong: Hong Kong Safety	
Electromagnetic	Canada: ICES, USA: FCC, EU, EFTA countries, Turkey / UK: EMC Directive (CE/UKCA), Morocco: Safety & EMC Regulation (CP), Ukraine: Safety & EMC Regulation (Ukraine conformity mark), Australia: Australia EMC framework (RCM), Korea: MSIP Regulation (KC), Japan: VCCI	
Environmental	Mexico Catalog Law, WEEE (EU, Korea, India, Argentina), RoHs (EU, Turkey, Ukraine, China, India, Taiwan, UAE, Korea, EAEU, Vietnam, Montenegro, Norway), REACH	
Ink	Eco-Passport, ZDHC, Toy Safety Regulation (EN71-3, phthalate)	
What's In The Box*	Main unit, Claning kit, Signal Lamp, Waste ink bottle, Media cleaner brush, Presser roller spacer, Wiper roll, Charging unit, Dryer unit, Media guide bar, Ink supply unit, Auto take-up reel unit, Start-up guide, Software CD-ROM, Epson Edge Print Pro CD-ROM	

* Items may differ depending on your region.

Dimensions & Weight

SC-F11030

Printing with Standard Roll Unit & Standard Reel Unit

Weight: 736 kg (1,622 lb)

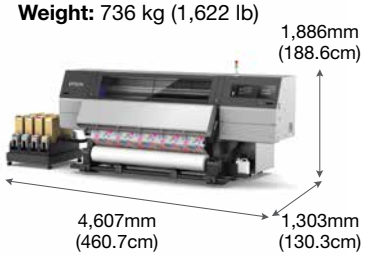

SC-F11030H

Printing with Standard Roll Unit & Standard Reel Unit

Weight: 767 kg (1,691 lb)

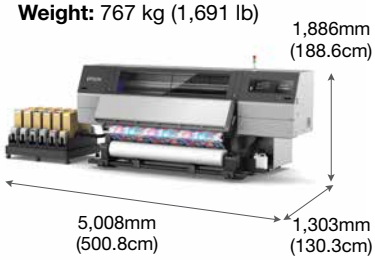

Jumbo Roll Unit

Consumables

High Density Black	C13T43G100
Cyan	C13T43G200
Magenta	C13T43G300
Yellow	C13T43G400
Light Cyan	C13T43G500
Light Magenta	C13T43G600
Fluorescent Yellow	C13T43G700
Fluorescent Pink	C13T43G800
Orange	C13T43GA00
Violet	C13T43GD00

Options

Media cleaner brush	C12C936031
Presser roller spacer	C12C936041
Cleaning Kit	C13S210103
Wiper Roll	C13S210065
Jumbo Roll Unit	C12C939331

© 2025 Epson India Pvt. Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited. EPSON is registered trademark of Seiko Epson Corporation. All other products names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. Print samples shown are simulations only. Specifications and product availability are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Information correct as of October 2026.

EPSON INDIA PVT. LTD.
11th Floor, Godrej Centre, Hebbal, Survey No.26, Bellary Road, Sahakar Nagar, Byatarayanapura, Bangalore 560 092, Karnataka.
Tel: 080-6939 5000 Fax: 080-6939 5005

FOR DYE-SUBLIMATION PRINTERS - Email: **gopal@eid.epson.co.in** or call Gopala Krishna **79751 85505** South: Karnataka/Kerala **98103 22600**, Tamil Nadu **86609 90605**, AP/TS **76800 75640** NORTH Delhi/NCR **99101 08780**, UP **94714 91562**, Punjab/J&K **98153 94550**, Madhya Pradesh/Rajasthan **98405 03210** EAST WB/Odisha **98746 72616**, Assam **76629 23467**, Bihar/Jharkhand **73034 19414** WEST Mumbai/ Nagpur/Chhattisgarh **93898 35156**, Pune/UPC/Goa **95613 81005**, Gujarat **97250 18025**

eClean e-Waste to e-Clean call . clear . clean

Epson Helpline: For product info or service - 1800 425 0011
For service: 1800 123 001 600 or 1860 3000 1600 (9 am - 6 pm) (Mon - Sat)
Email: lfp@epson-india.in **www.epson.co.in**

Dealer's Stamp