

EB-PU1008B WUXGA 3LCD Laser Projector with 4K Enhancement¹



Product shown with lens.
Lens sold separately.

Projectors

Large Venue

Premium, compact large venue laser projector with 4K Enhancement¹.

Best-in-Class Color Brightness² — 8,500 lumens of color/white brightness³ from a compact large venue laser projector

Exceptional widescreen display — native WUXGA with 4K Enhancement Technology¹ (1920 x 1200 x 2); accepts 4K content and provides up to 4.6 million pixels onscreen

Worry-free operation — features a virtually maintenance-free 20,000-hour laser light source and air filter⁴

Simplified installation features — 11 optional powered lenses including ultra short throw with .35 throw; inputs including HDBaseT[®] and HDMI[®] (HDCP 2.3)

NFC function built in⁵ — reduce installation time of multiple projectors; read and write setting information using Epson's mobile app

Clip-on optional external camera — access powerful automated tools including auto color calibration⁶, screen matching of multiple projectors⁶, tiling assist⁷ for edge blends and the stacking assist⁷ function

Lifelike images — high native contrast ratio, HDR support⁸ and scene adaptive gamma correction for more realistic images and easy-to-read presentations

Optional external air filter — extend the filter maintenance cycle in dusty environments

Dynamic projection capabilities — advanced built-in edge blending, image warping and shape overlay features for a variety of applications; direct content playback from USB storage media

Customized performance — brightness modes to maximize light source life and provide a consistent brightness level

Powerful remote management — control and monitor projector status via the Epson[®] Projector Management app⁹ for Windows[®]



Specifications

Projection System High-Aperture Epson 3LCD, 3-chip technology
Projection Method Front/rear/ceiling mount
Driving Method Poly-Silicon TFT Active Matrix
Pixel Number 2,304,000 dots (1920 x 1200) x 3
Signal Input Maximum Display Resolution: 4096 x 2160 pixels (resizing display); Display Resolution: 1920 x 1200 pixels
Native Resolution WUXGA with 4K Enhancement¹ (1920 x 1200 x2)
Resolution on Screen WUXGA with 4K Enhancement¹/4.6 million pixels¹
Aspect Ratio Supports 4:3, 16:10, 16:9*, 21:9*
 * With vertical image shift control within letterbox area.
Pixel Arrangement Cross stripe
Color Brightness³ Color Light Output: 8,500 lumens
White Brightness³ White Light Output: 8,500 lumens
Contrast Ratio Up to 2,500,000:1 (Dynamic Contrast: On)
Brightness Uniformity (Typical) 85%
Color Reproduction Up to 1.07 billion colors
Keystone Correction
 Vertical: ±45 degrees;
 Horizontal: ±30 degrees
Illumination Technology Laser Phosphor
Projection Lens (Standard)
 See website for information on optional lenses.
Standard Lens ELPLM08 (sold separately)
Type Powered shift/focus/zoom
F-Number 1.7 – 2.3
Focal Length 24.0 mm – 38.2 mm
Zoom Ratio Optical zoom 1.0 – 1.6x
Throw Ratio Range 1.45 – 2.32
Lens Shift Vertical: ±67%; Horizontal: ±30%

Other

Operating Temperature 32 °F to 113 °F (0 °C to 45 °C)
Power Supply Voltage 100 V – 240 V AC ±10%, 50/60 Hz
Power Consumption
 559 W (Normal, Custom)
 469 W (Medium, Quiet, Extended)
 2.0 W Standby (Communication On)
 0.5 W Standby (Communication Off)
Fan Noise 35 dB (Normal Mode), 34 dB (Medium Mode), 30 dB (Eco Mode)
Security Security cable hole, lens lock, Kensington lock provision, wireless LAN unit lock

Video I/O

Input Signal Input Video Signal (HDMI, DVI-D and HDBaseT ports) 480i/480p/576i/576p/720p/1080i/1080p/3840 x 2160/4096 x 2160 - Max PC graphics: 2560 x 1600

Interfaces

DVI-D x 1
 HDMI (HDCP 2.3) x 1
 HDBaseT x 1
 RGB D-Sub 15-pin
 Variable Audio Out: Mini Stereo x 1
 USB Connector Type A x 2
 USB Connector Type B x 1
 Serial: RS-232C x 1
 Remote Stereo Mini
 Network: RJ-45

Video I/O (Continued)

Auto Power On Signal Detection on HDMI/Plug-In Detection (HDMI, VGA 15-pin)
Sleep Mode Yes (with timer)
HDMI CEC Control Yes

Dimensions (W x D x H)

Excluding Feet, Lens 21.5" x 17.2" x 6.5"
Weight 35.9 lb

Remote Control

Features Power, source search selection, lens shift, zoom, focus, test pattern selection, A/V mute, freeze, user ID, auto, aspect, color mode, number, page up and down, E-Zoom, volume, help, menu, enter, ESC and pointer functions
Operating Angle
 Angle Front: Right/Left: 60 to +60; Upper/Lower: +30 to 20 degrees
 Angle Rear: Right/Left: 30 to +30; Upper/Lower: +50 to +10 degrees
Operating Distance 98 ft

Eco Features


RoHS compliant
 Recyclable product¹⁰
 Epson America, Inc. is a SmartWay[®] Transport Partner¹¹

Support

Epson ConnectionSM
 Pre-Sales Support (U.S. and Canada): 800-463-7766
 Website: www.epson.com

Service Programs

The projector has a limited warranty of 3 years. Epson Road Service program with free Next-Business-Day Replacement¹², PrivateLine[®] dedicated toll-free support (U.S. and Canada only)

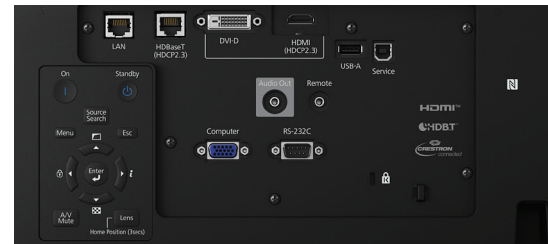

What's in the Box

EB-PU1008B laser projector, power cable, remote control with 2 batteries, cable cover, lens connector cap, user guide and warranty sheet

Ordering Information

EB-PU1008B	V11HA33820
ELPLAF46	V13H134A46
External Air Filter (ELPAF63)	V13H134AD0
Ultra Short Throw Lens (ELPLX01S)	V12H004X0A
Ultra Short Throw Lens – White (ELPLX01WS)	V12H004Y0A
Short Throw #1 zoom Lens (ELPLU03S)	V12H004UA3
Short Throw #2 zoom Lens (ELPLU04)	V12H004U04
Wide Throw #1 zoom Lens (ELPLW05)	V12H004W05
Wide Throw #2 zoom Lens (ELPLW06)	V12H004W06
Wide Throw #3 zoom Lens (ELPLW08)	V12H004W08
Middle Throw #1 zoom Lens (ELPLM08)	V12H004M08
Middle Throw #2 zoom Lens (ELPLM15)	V12H004M0F
Middle Throw #3 zoom Lens (ELPLM10)	V12H004M0A
Middle Throw #4 zoom Lens (ELPLM11)	V12H004M0B
Long Throw Zoom Lens (ELPLL08)	V12H004L08
External Camera (ELPEC01)	V12HA46010
Rigging Frame	ELPMB59
Wireless LAN Module (ELPAP11)	V12H005A02
Projector Ceiling Mount (ELPMB67)	V12HA54010
Suspension Adapter (ELPPF15)	V12HA55010

1 4K Enhancement Technology shifts each pixel to surpass Full HD resolution on screen. | 2 Color brightness measured per IDMS 15.4. Additional colors and picture modes tested. Top-selling Epson 3LCD projectors vs. comparable top-selling 1-chip DLP projectors based on NPD sales data for October 2019 – September 2020. COLOR BRIGHTNESS WILL VARY BASED ON USAGE CONDITIONS. | 3 Color brightness (color light output) and white brightness (white light output) will vary depending on usage conditions. Color light output measured in accordance with IDMS 15.4; white light output measured in accordance with ISO 21118. | 4 No required maintenance for the light source and filter up to 20,000 hours. Approximate time until brightness decreases 50% from first usage. Measured by acceleration test assuming use of 0.04 – 0.20 mg/m³ of particulate matter. Time varies depending on usage conditions and environment. Replacement of parts other than the light source may be required in a shorter period. | 5 NFC requires use of a device that includes NFC and may require additional software. | 6 Using separate camera for each projector. | 7 Requires Epson external camera or built-in camera for each projector and the Epson Projector Professional Tool app. | 8 HDR performance available with select third-party devices. For more information, see www.epson.com/hdrcompatibility | 9 Internet connection required for download. Data usage fee may apply. | 10 For convenient and reasonable recycling options, visit www.epson.com/recycle | 11 SmartWay is an innovative partnership of the U.S. Environmental Protection Agency that reduces greenhouse gases and other air pollutants and improves fuel efficiency. | 12 Expedited shipping not available in all areas. Road Service orders must be placed and processed by 3 p.m. Eastern Time for Next-Business-Day delivery.

See the latest innovations from Epson Business Solutions at www.epson.com/forbusiness

Better Products for a Better Future[™]
eco.epson.com



Epson America, Inc.
3131 Katella Ave., Los Alamitos, CA 90720

Epson Canada Limited
185 Renfrew Drive, Markham, Ontario L3R 6G3

www.epson.com
www.epson.ca

Specifications and terms are subject to change without notice. EPSON is a registered trademark, EPSON Exceed Your Vision is a registered trademark and Better Products for a Better Future is a trademark of Seiko Epson Corporation. PrivateLine is a registered trademark and Epson Connection is a service mark of Epson America, Inc. Windows is either a registered trademark or trademark of Microsoft Corporation in the United States and other countries. SmartWay is a registered trademark of the U.S. Environmental Protection Agency. All other product and brand names are trademarks and/or registered trademarks of their respective companies. Epson disclaims any and all rights in these marks. Copyright 2022 Epson America, Inc. Com-SS-Oct-13 CPD-61034R3 12/22